



QJMOTOR Store Building Guidebook

SHANGHAI ZONGQING ARCHITECTURAL CONSULTANTS STUDIO




The copyright belongs to Zhejiang Qianjiang Motorcycle Co., Ltd. and shall not be disclosed to others! This manual is only for use by QJMOTOR offices and agents!





QJMOTOR J-store
standard shop design


QJMOTOR J Store - Standard Store

Parts Code	Props Name	Specification (mm)	Picture	Unit	Unit Price/¥	V/m ³	NW/Kg	
FG1150110011	Header sign (back light) I	$L \leq 2.4m$		m	1,044.99/m	0.113	15.8	P10
FG1150110021	Header sign (back light) II	$2.4m < L < 3m$		m	1,331.00/m			
FG1150110031	Header sign (back light) III	$3m \leq L < 4m$		m ²	1,452.00/m ²			
FG1150110041	Header Illuminated letters (back light) I	$L \leq 12m$		m	937.75/m	0.23	25.4	P10
FG1150110051	Header Illuminated letters (back light) II	$L > 12m$		m ²	1,089.00/m ²			
FG1150110061	Outdoor side billboard	Ø800*D120mm		Set	797.61			P28
FG1150110071	welcome Illuminated letters	1700*280*D25mm		Set	1,027.29	0.009	14.9	P29
FG1150110081	service Illuminated letters	1400*280*D25mm		Set	845.79	0.007	13.5	P30
FG1150110091	QJ Illuminated letters	775*400*D25mm		Set	664.29	0.008	12	P31

FG1150210011	Standard modular wall plate A	L890*H890*D40		Pcs	275.29	0.031	1	P32
FG1150210021	Standard modular wall plate B	L890*H890*D40		Pcs	339.26	0.031	1	
FG1150210031	Adjusting modular wall plate C	890*300*40		Pcs	134.52	0.01	0.33	
FG1150210041	Adjusting modular wall plate D (Red)	890*300*40		Pcs	134.52	0.01	0.33	
FG1150210051	White illuminated strip light box	W=50mm L=3000mm		Pcs	202.02	0.006	0.4	
FG1150210061	Theme wall illuminated LOGO (back light)	W978*H507(LOGO H350) *D25mm		Set	1,269.29	0.012	18.6	P32
FG1150210071	Standard background wall	W3600*H3000*D200		Set	8,349.00	2.16	83	P33
FG1150210081	Standard modular wall plate	L890*H890*D40		Pcs	240.79	non-standard	non-standard	P34
FG1150210091	Non-standard modular wall plate	Grey non-standard notched module		Pcs	240.79	non-standard	non-standard	P34
FG1150210101	Standard trunking board wall plate	L890*H890*D40		Pcs	275.29	non-standard	non-standard	P34
FG1150210111	Adjusting modular wall plate	890*300*40		Pcs	95.59	non-standard	non-standard	P34


FG1150210121	Reception desk	Fogged stainless steel plate main cabinet: L2400*600*H1100 mm		Set	4,682.70	2.82	156	P35
		Red lacquered L baffle: L2000*W600*H1150mm			683.36			
FG1150210131	Oil-barrel table	Diameter: 700mm, Height: 1150mm		Pcs	385.99	0.42	9	P36
FG1150210141	Barstool	Regular size		Pcs	1,265.30		5	P37
FG1150310011	Standard racking	1310*2400		Group	1156.75	0.13	68.8	P38
FG1150310041	Multipoint hanging rod	L=600		Pcs	14.40			

FG1150310051	Straight hook	L=300		Pcs	9.56			
FG1150310061	Curved hook	L=300		Pcs	4.72			
FG1150310081	Standard movable light box (single-sided)	1400*200*2400		Group	1,875.50	0.67		P85
FG1150310091	Removable dress rack	711*660*1473		Set	1,241.82	0.69	40	P40
FG1150310101	Key motorcycle floor	3100*1500*190		Set	2,800.20	0.88	99	P41

FG1150310111	Key motorcycle supporting light box	3100*1500*300		Set	3,410.52	1.4	46	P42
FG1150310121	Decorative Light A (Custom)	L1800*W80*H300		Pcs	498.62	/	/	P43
FG1150310131	Decorative Light B (Custom)	L1600*W80*H300		Pcs	498.62	/	/	P43
FG1150310141	Decorative Light C (Custom)	L1200*W80*H300		Pcs	301.29	/	/	P43
FG1150310151	Decorative Light D (Custom)	L1000*W80*H300		Pcs	240.79	/	/	P43
FG1150310161	Decorative Light E (Custom)	L900*W80*H300		Pcs	192.39	/	/	P43
FG1150310171	Decorative Light F (Custom)	L600*W80*H300		Pcs	143.99	/	/	P43

FG1150310181	High and low tables	500*1000*H800		Set	1,486.47	0.9	26.1	P44
		500*1000*H600			593.23			
		500*1000*H400			2,352.46			
FG1150310191	Parameter board	250*1000*270		Set	2,299.00	0.68	6.7	P89
FG1150310201	White neon letter a	L2690*H935mm		Set	1,486.47	0.63		P45
FG1150310211	White neon letter b	L2485*H745mm		Set	593.23			

FG0239802100	QJMOTOR brand advertising tent (black and red)	3m*3m		Pcs	344.85	P86
FG0239804200	QJMOTOR brand beach flag (white and red)	L0.7m*H3.4m		Pcs	93.7	P87
FG0231601000	QJMOTOR motorcycle mat	1m*2.4m		Pcs	152.1	P88



DARK GREY WALL PAINT
Color: RAL7024



**DARK GREY BAKING
VARNISH BOARD**
Color: RAL7021




RED WALL PAINT
Color: RAL3016



**BLACK ALUMINUM
PLASTIC PLATE**
Color: RAL8022



**RED ALUMINUM PLASTIC
PLATE**
Color: RAL3028

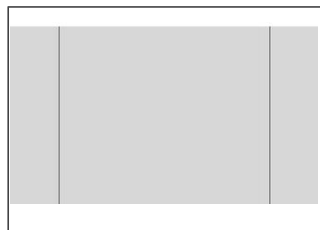

**SILVER GRAY ALUMINUM
PLASTIC PLATE**
Color: RAL9006




WHITE GREY WALL PAINT
Color: RAL9010



**300*300
MEDIUM GREY ANTI-SKID FLOOR
TILE (WORK SHOP)**
Color: RAL7036



**800*800
ANTISKID BRICK**
Color: RAL7035

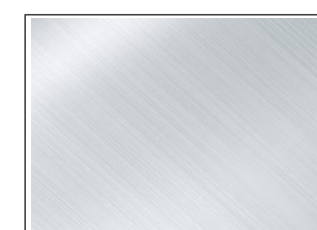

**DARK GREY BRUSHED
STAINLESS STEEL**
Color: RAL7024



KEY VISUAL ELEMENTS AND USAGE GUIDELIN






KEY VISUAL ELEMENTS AND USAGE GUIDELIN





KEY VISUAL ELEMENTS AND USAGE GUIDELIN

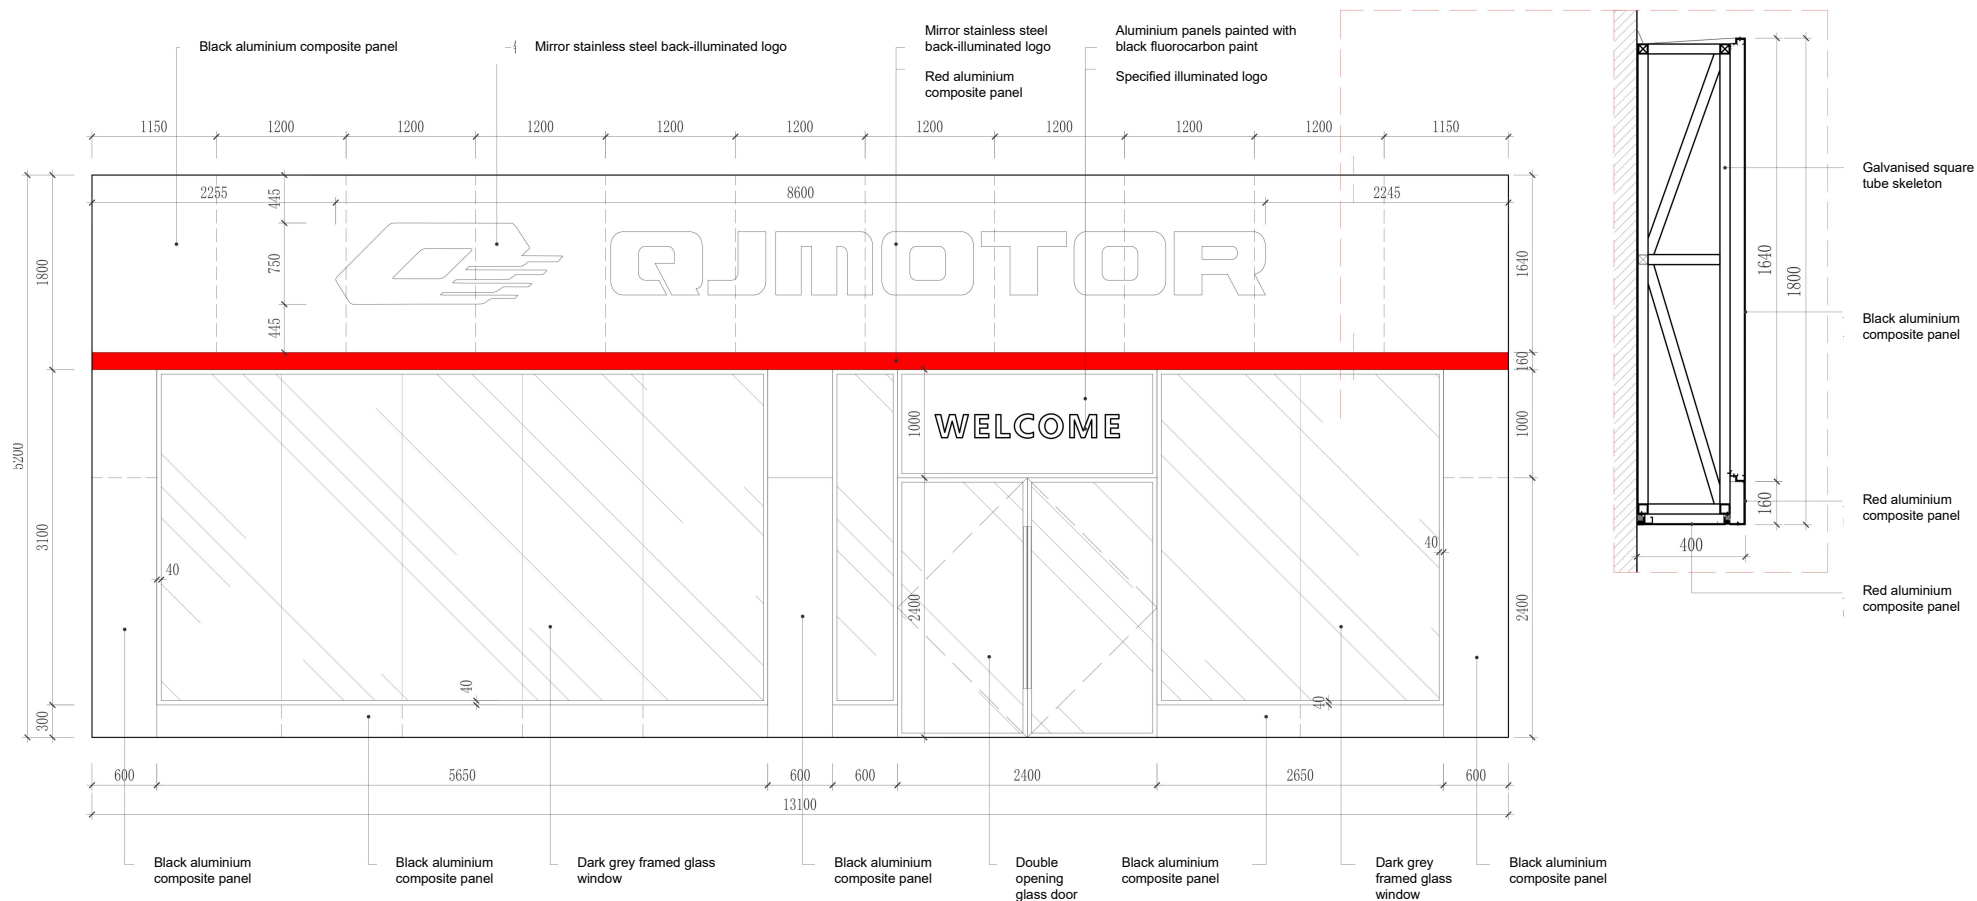



KEY VISUAL ELEMENTS AND USAGE GUIDELIN



KEY VISUAL ELEMENTS AND USAGE GUIDELIN



KEY VISUAL ELEMENTS AND USAGE GUIDELIN



KEY VISUAL ELEMENTS AND USAGE GUIDELIN






KEY VISUAL ELEMENTS AND USAGE GUIDELIN







KEY VISUAL ELEMENTS AND USAGE GUIDELIN

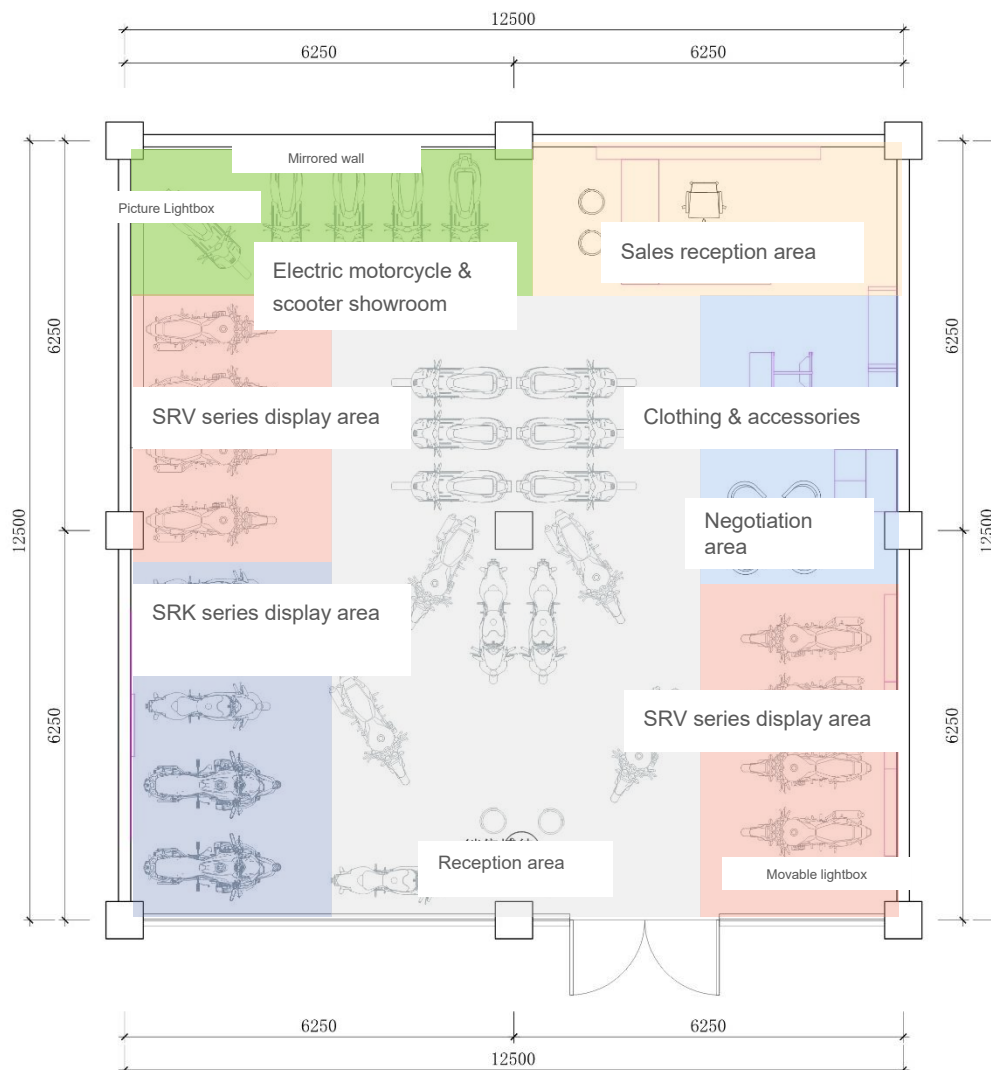


- Sales reception area
- Owner's rest area
- SRK series display area
- SRV series display area
- Motorbike showroom
- Clothing & accessories
- Electric motorcycle & scooter showroom


KEY VISUAL ELEMENTS AND USAGE GUIDELIN

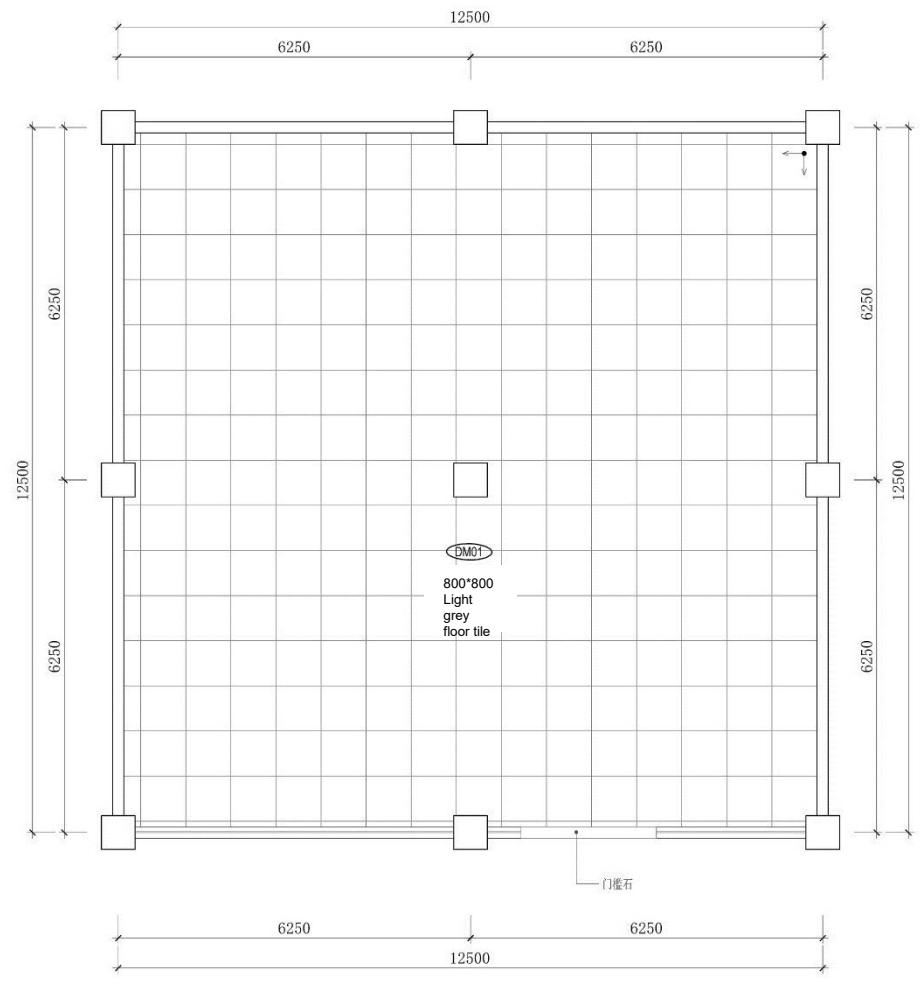

KEY VISUAL ELEMENTS AND USAGE GUIDELINES

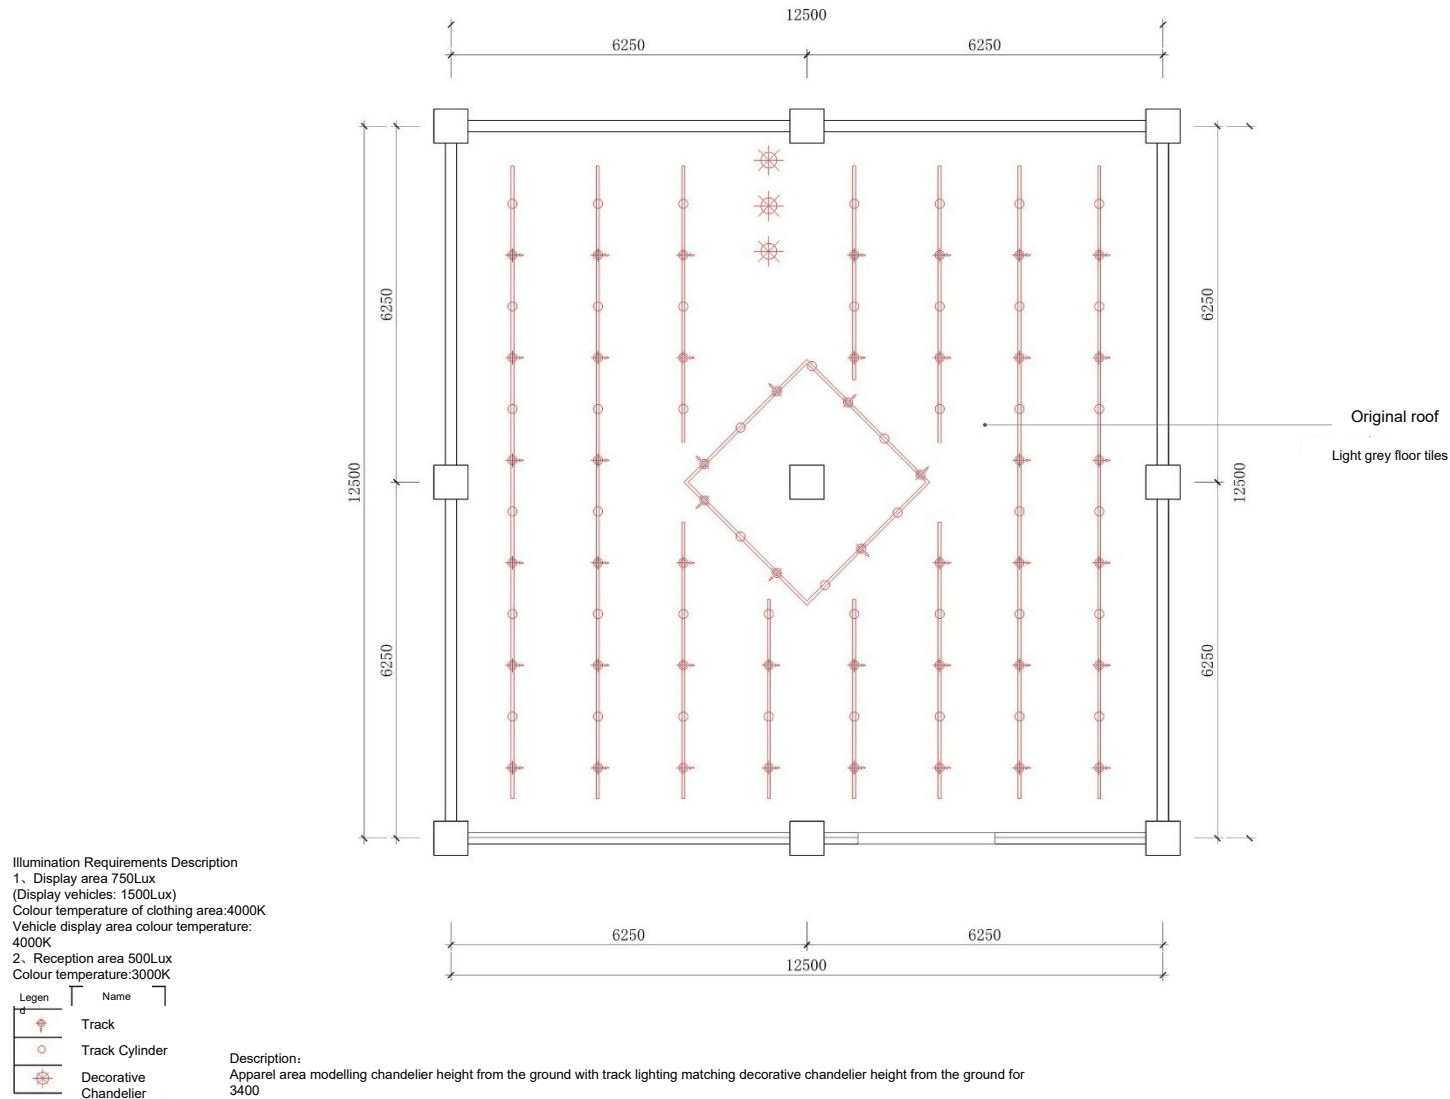

KEY VISUAL ELEMENTS AI

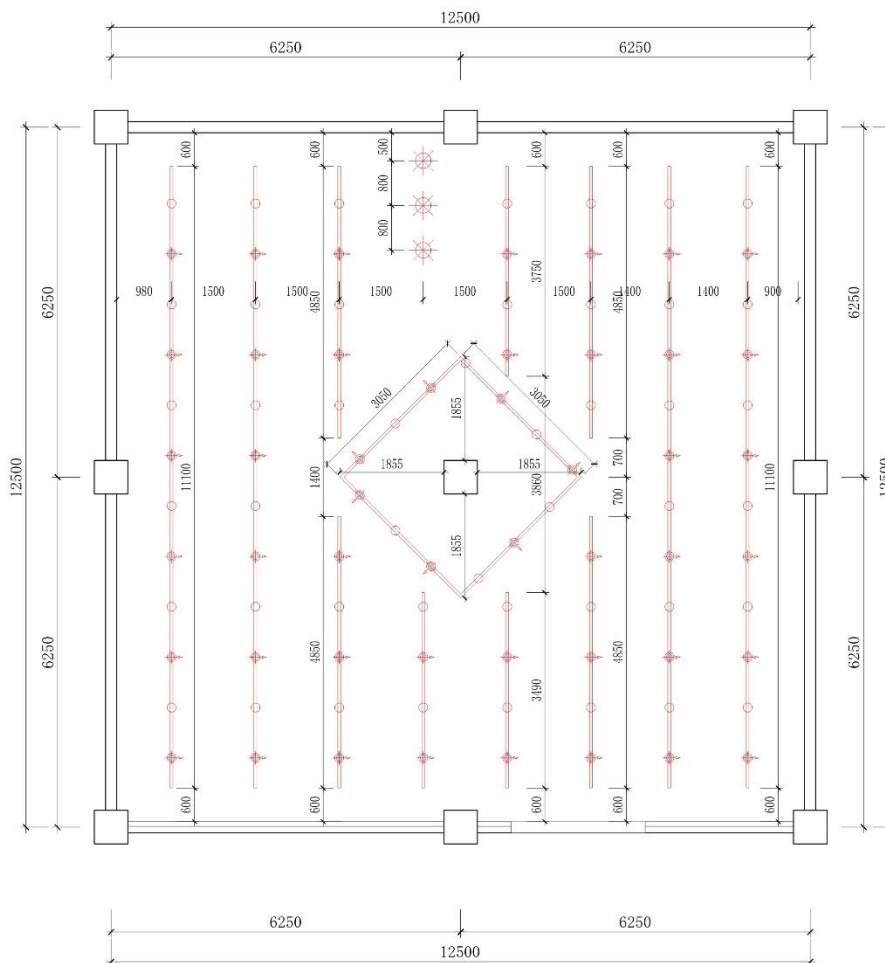

Illumination Requirements Description
1. Display area 750Lux
 (Display vehicles: 1500Lux)
 Colour temperature of clothing area:4000K
 Vehicle display area colour temperature:
 4000K
2. Reception area 500Lux
 Colour temperature:3000K

Legend	Name
	Track
	Track Cylinder
	Decorative Chandelier


Description:
Apparel area modelling chandelier height from the ground with track lighting matching decorative chandelier height from the ground for 3400



KEY VISUAL ELEMENTS AND USAGE GUIDELIN


1. The location and quantity of sockets should be constructed according to the local deepening design drawings.
2. All drawing dimensions are for reference only; strong and weak power point location map to the local deepening design drawings for the final construction basis
3. Please refer to the legend for the height of all power sockets unless otherwise specified.
4. Unless otherwise specified, all power sockets are 300 high.
5. The distance between the strong and weak power socket box is 100 wide.

	Two/three pole socket
	Two/Three Eyes Socket with Switch
	Junction box
	Floor socket
	Projection interface
	Audio Socket
	Mixed computer and telephone socket
	Telephone socket
	Wideband interface


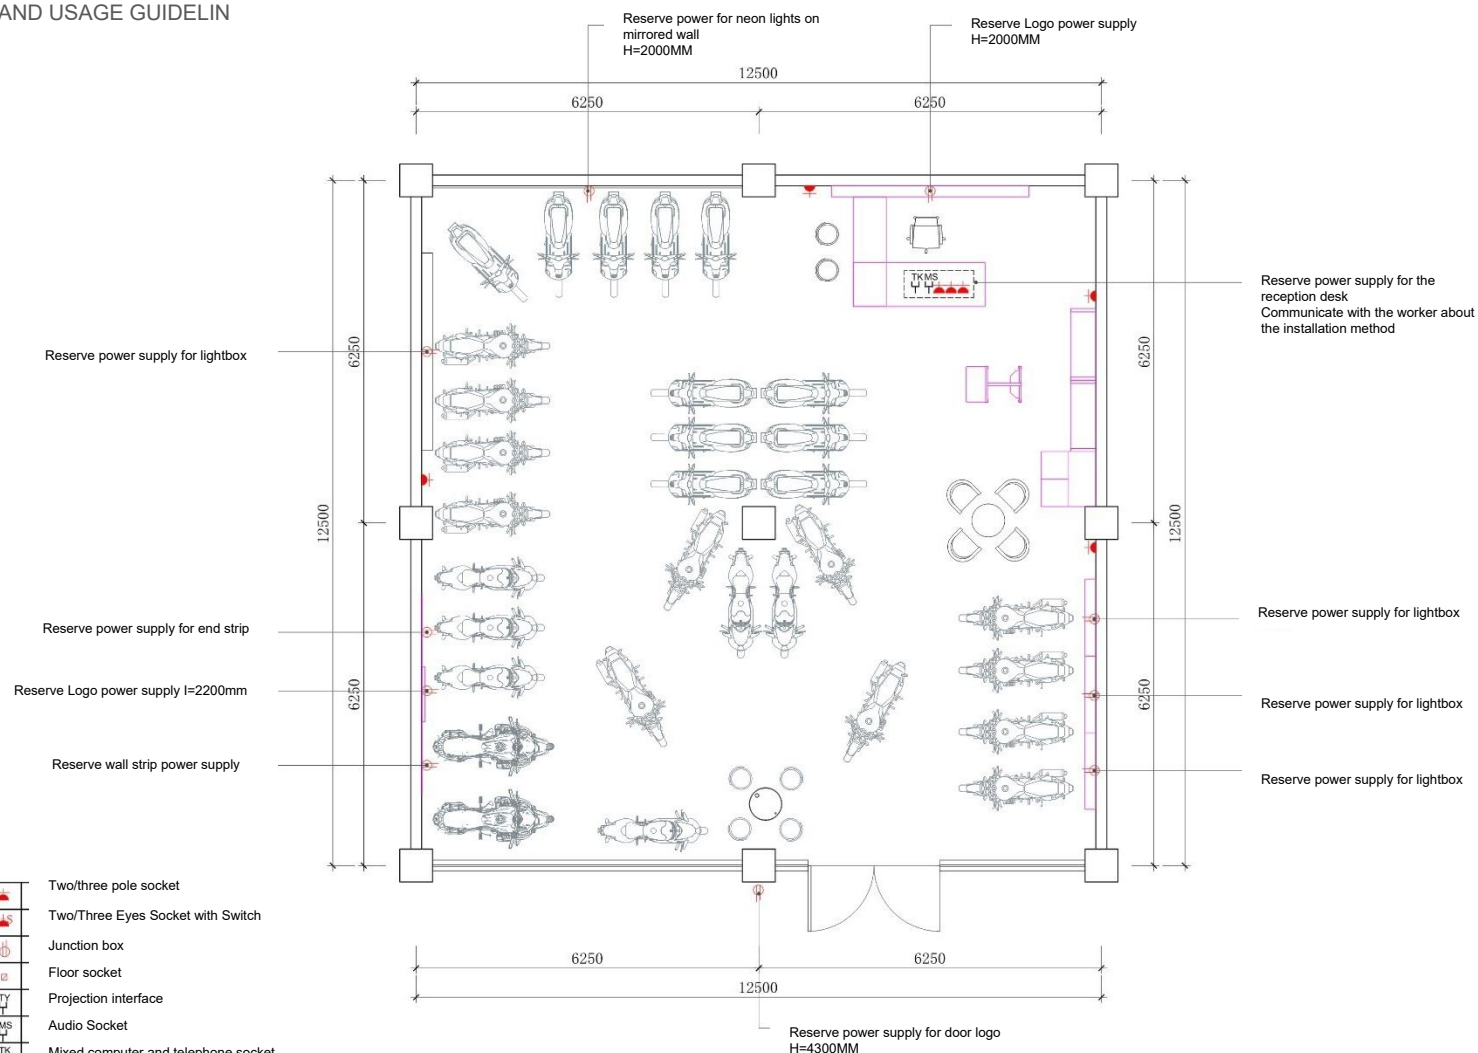






KEY VISUAL ELEMENTS AND USAGE C

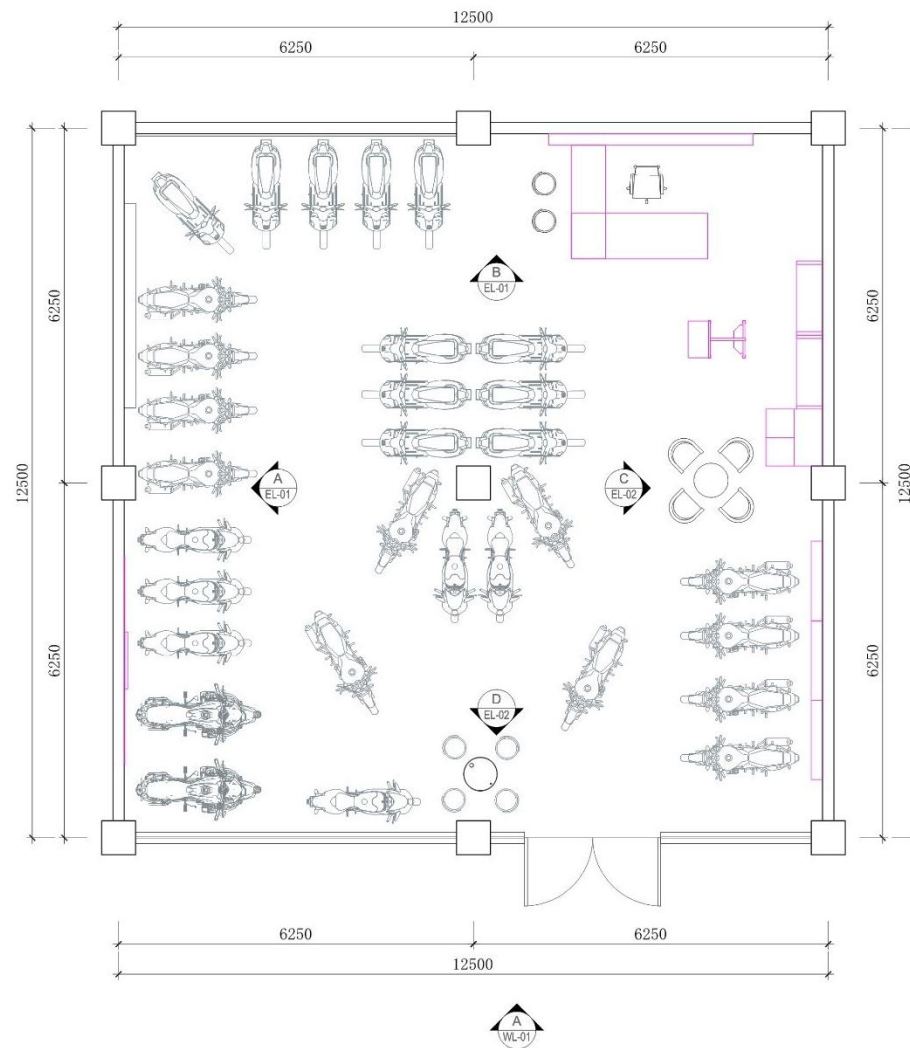



KEY VISUAL ELEMENTS AND USAGE GUIDELINES

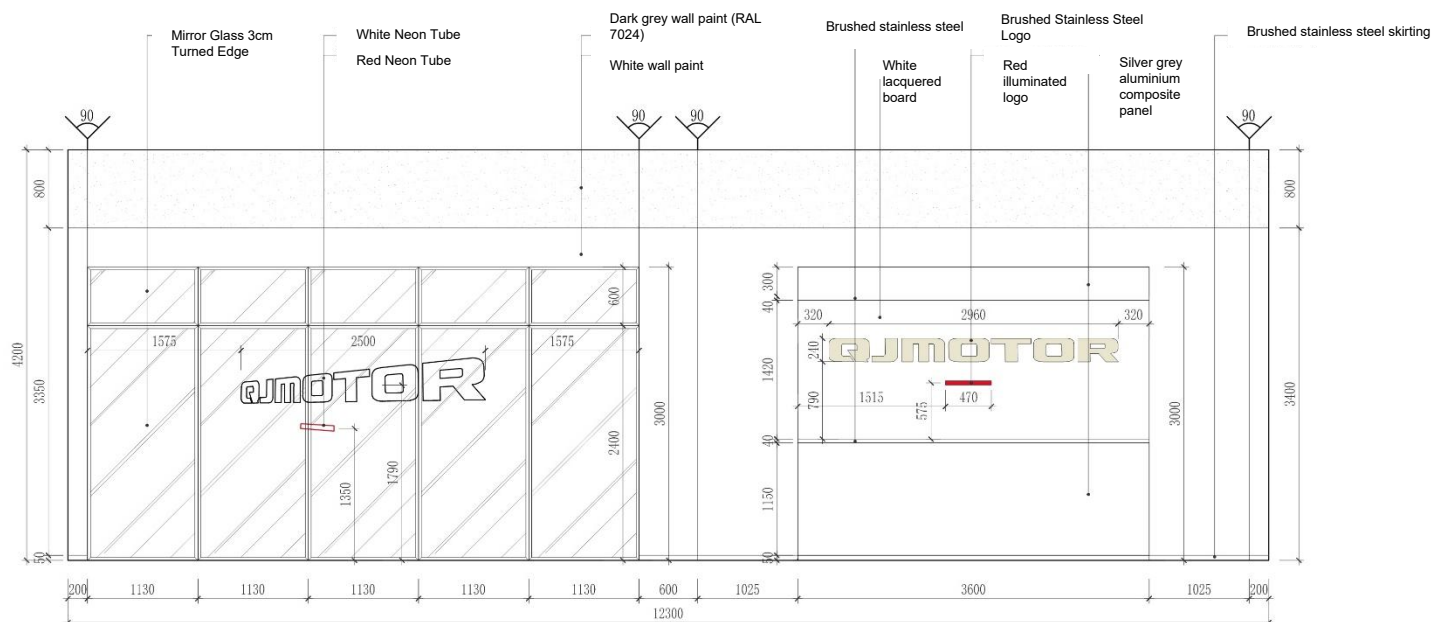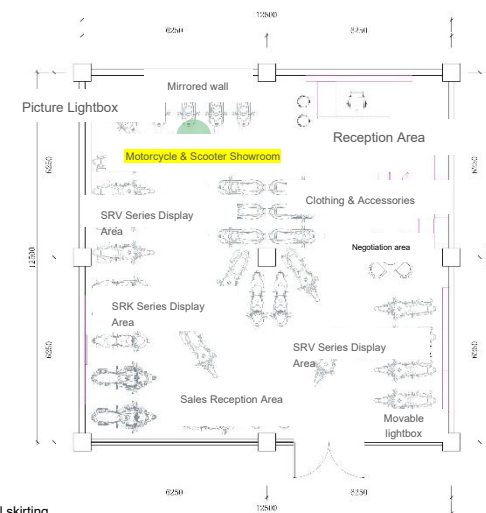



KEY VISUAL ELEMENTS AND USAGE GUIDELIN

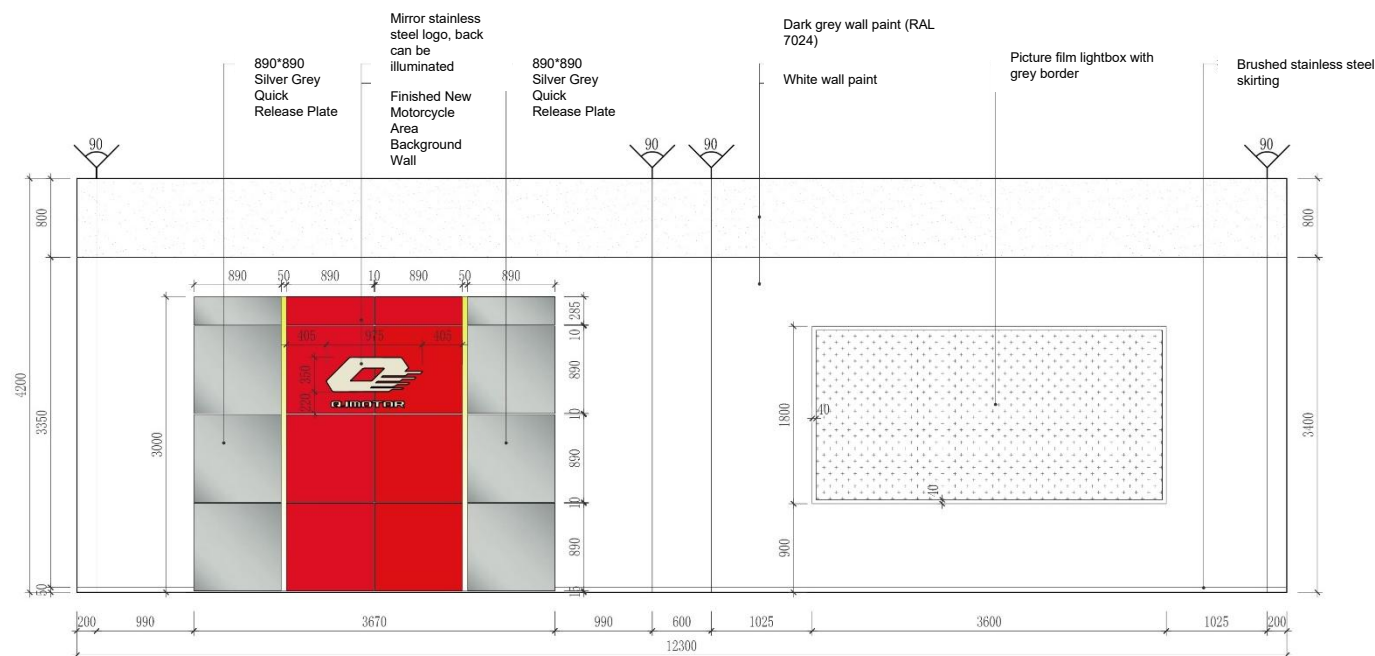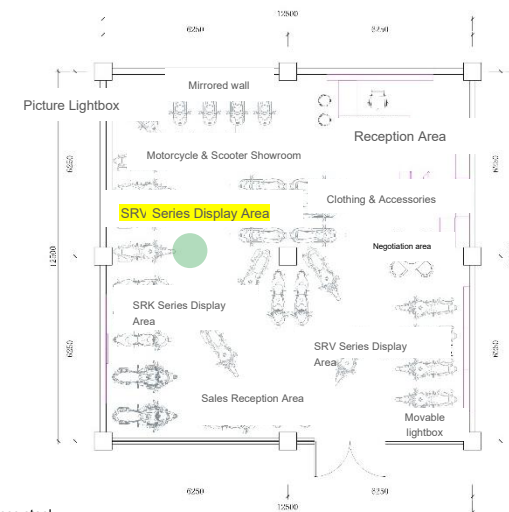

KEY VISUAL ELEMENTS AND USAGE GUIDELIN

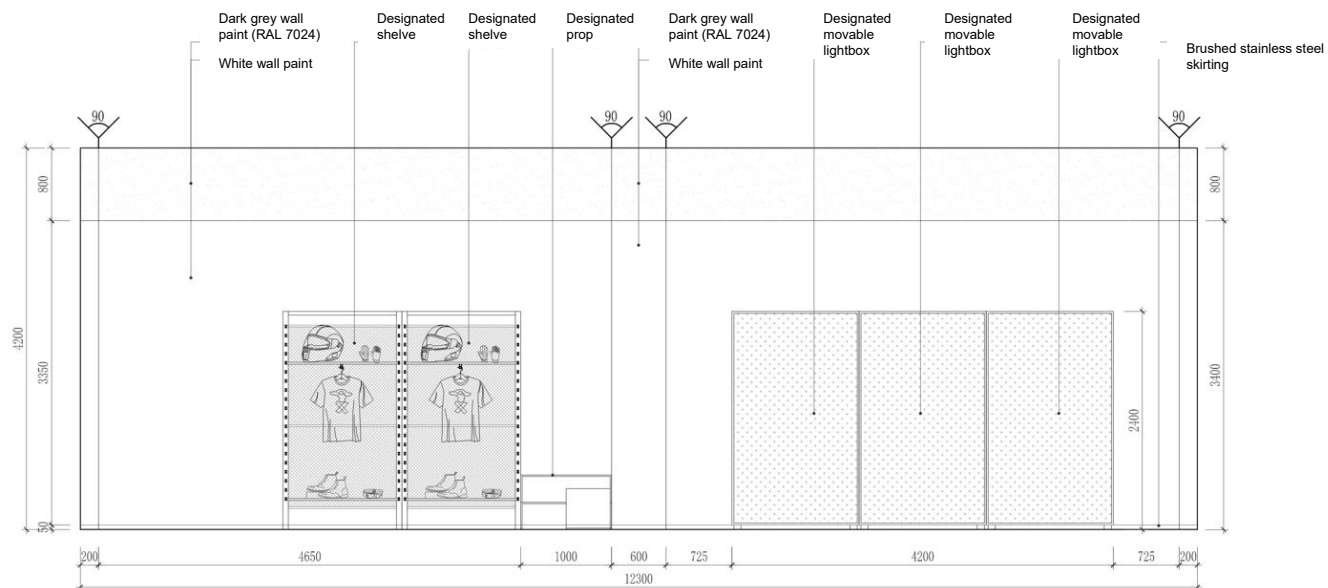
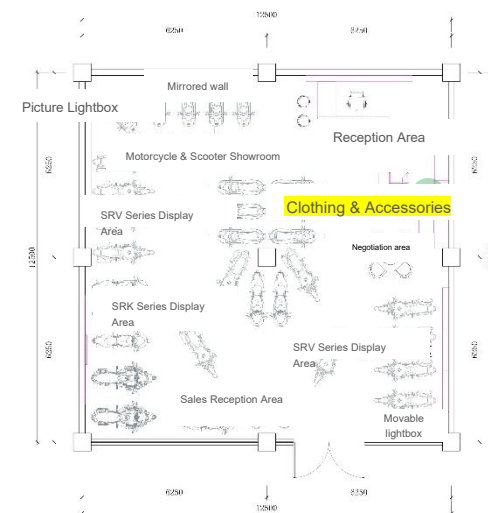


KEY VISUAL ELEMENTS AND USAGE GUIDELIN

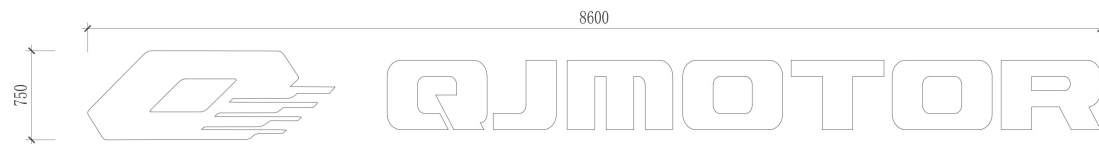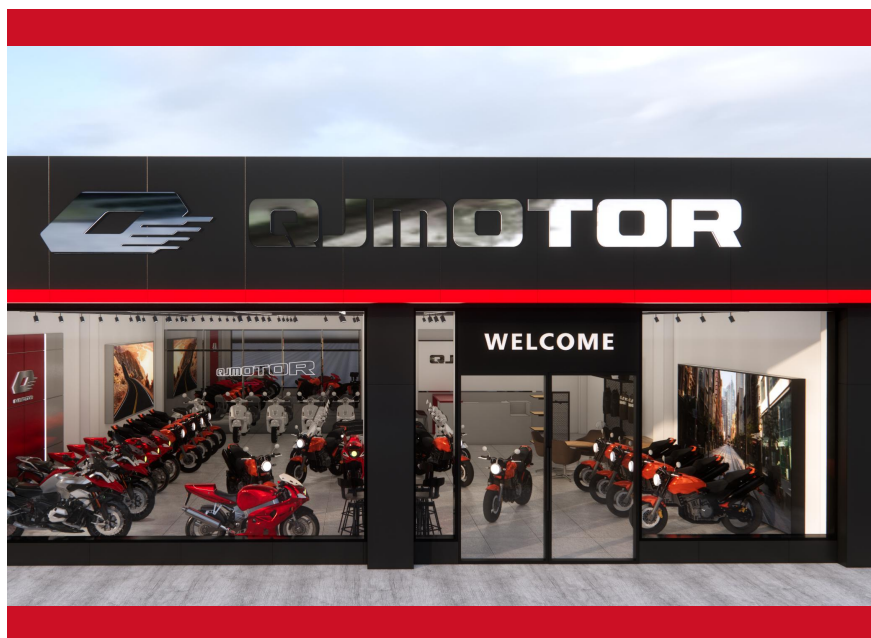


KEY VISUAL ELEMENTS AND USAGE GUIDELIN



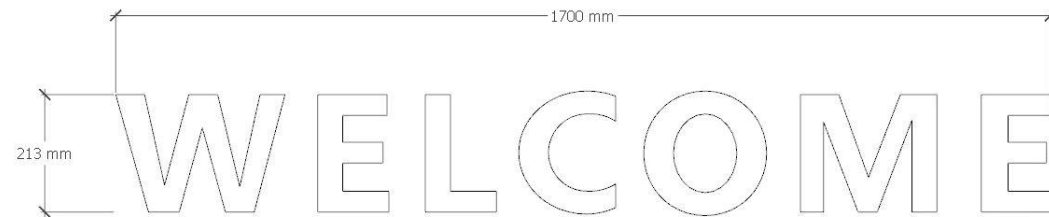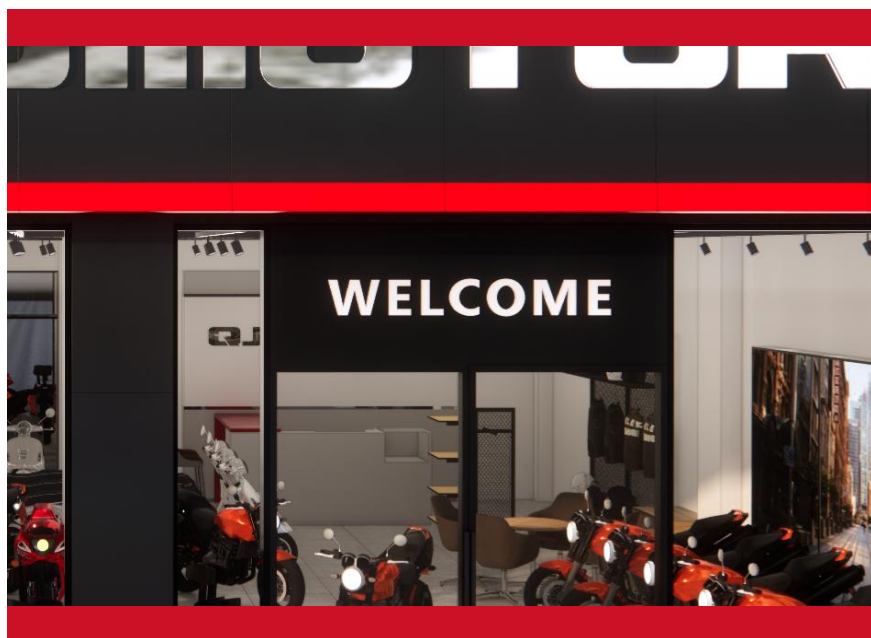






KEY VISUAL ELEMENTS AND USAGE GUIDELIN

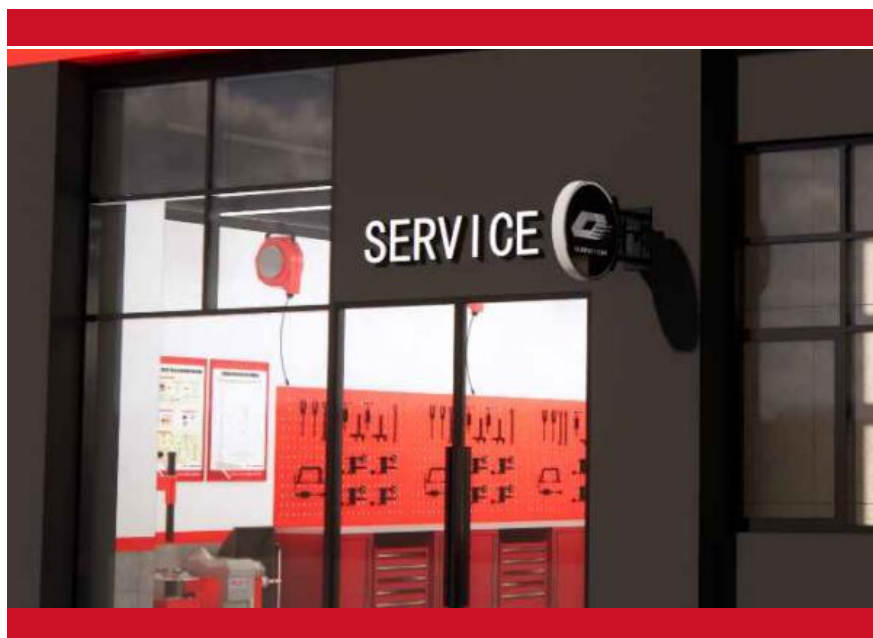

KEY VISUAL ELEMENTS AND USAGE GUIDELIN

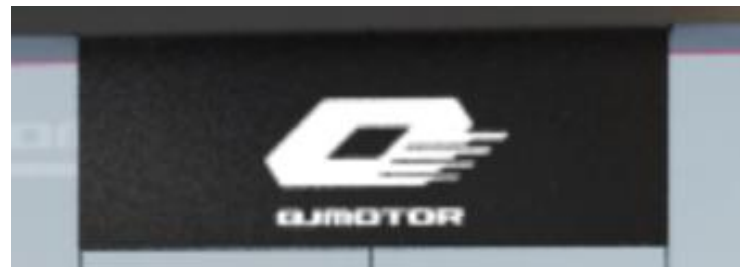


KEY VISUAL ELEMENTS AND USAGE GUIDELIN

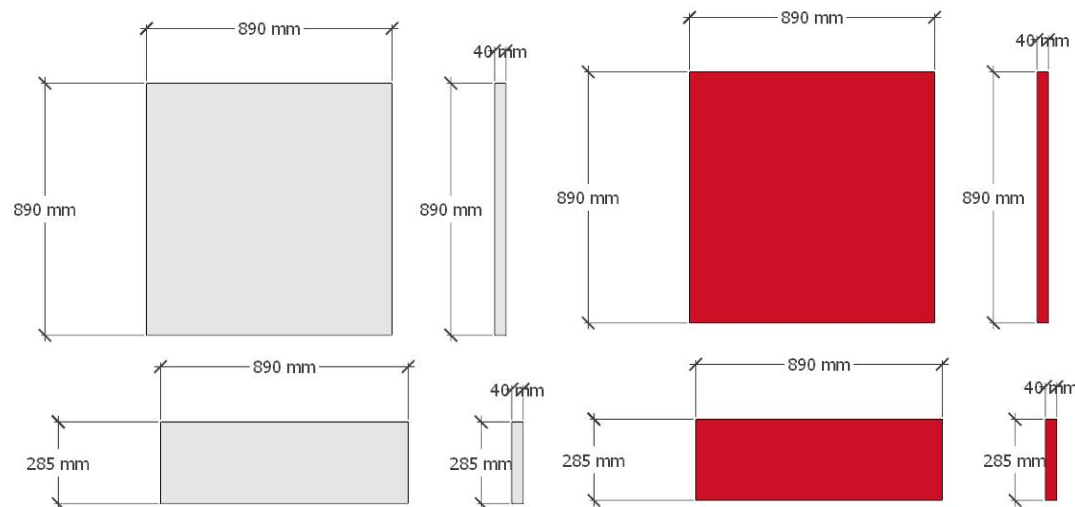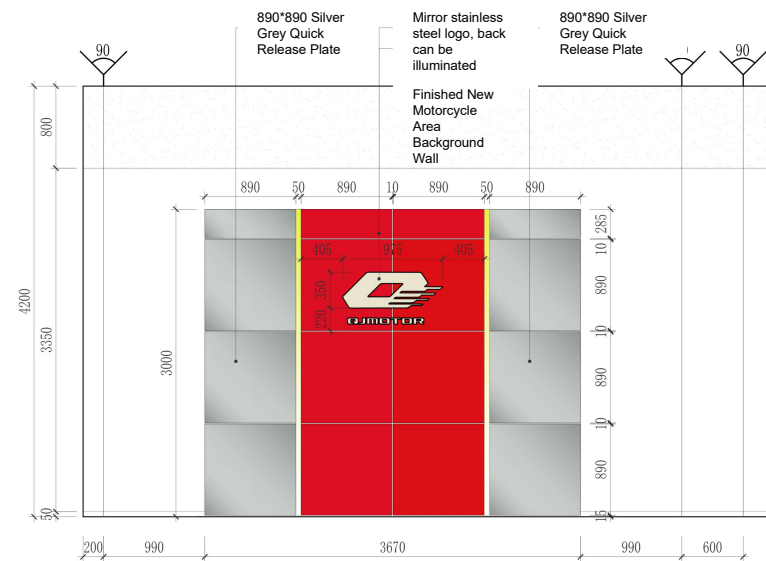








KEY VISUAL ELEMENTS AND USAGE GUIDELIN

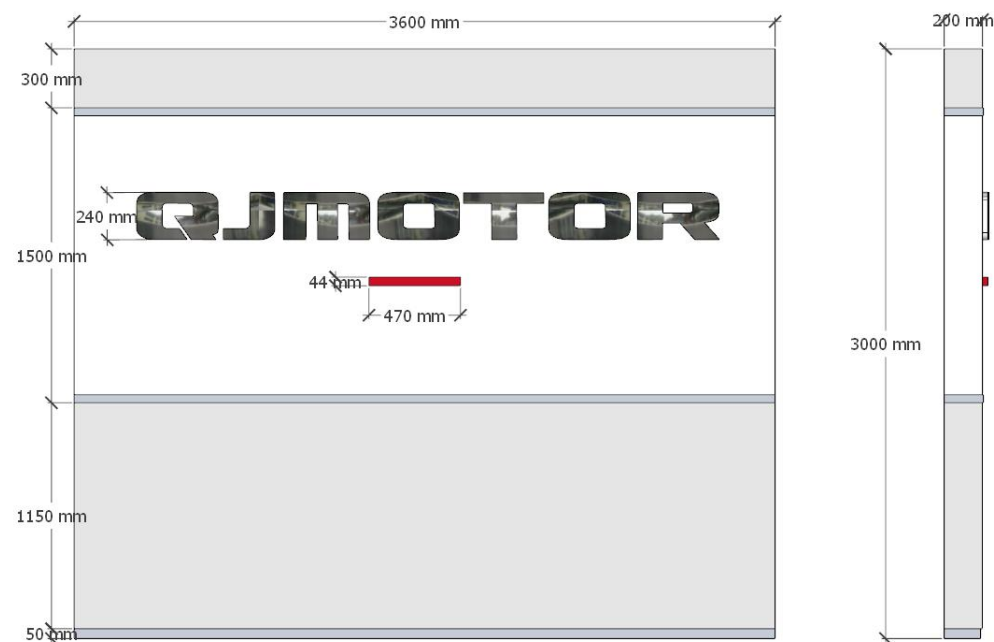






KEY VISUAL ELEMENTS AND USAGE GUIDELIN

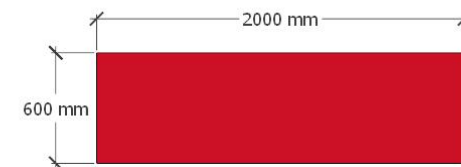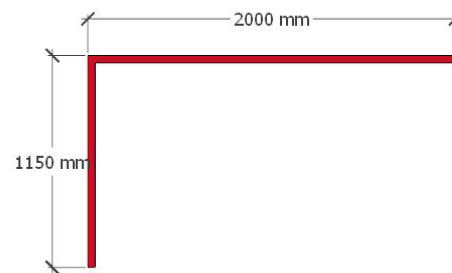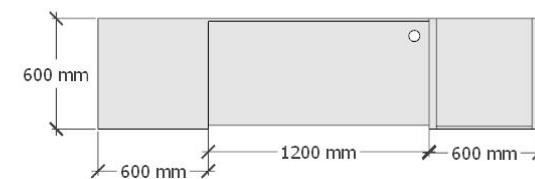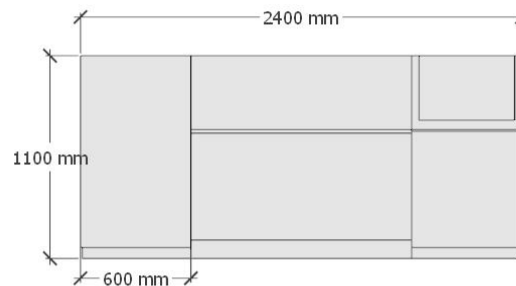
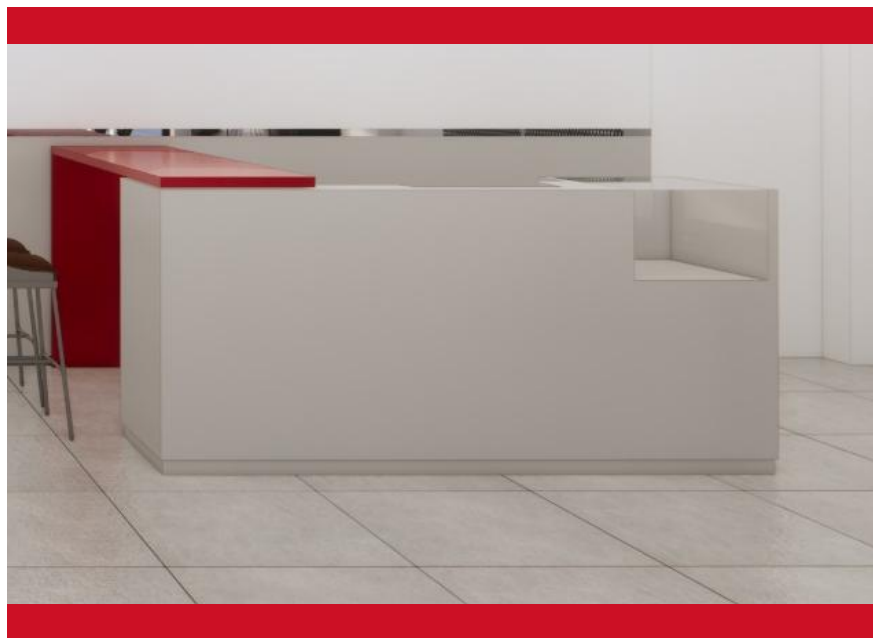




KEY VISUAL ELEMENTS AND USAGE GUIDELIN


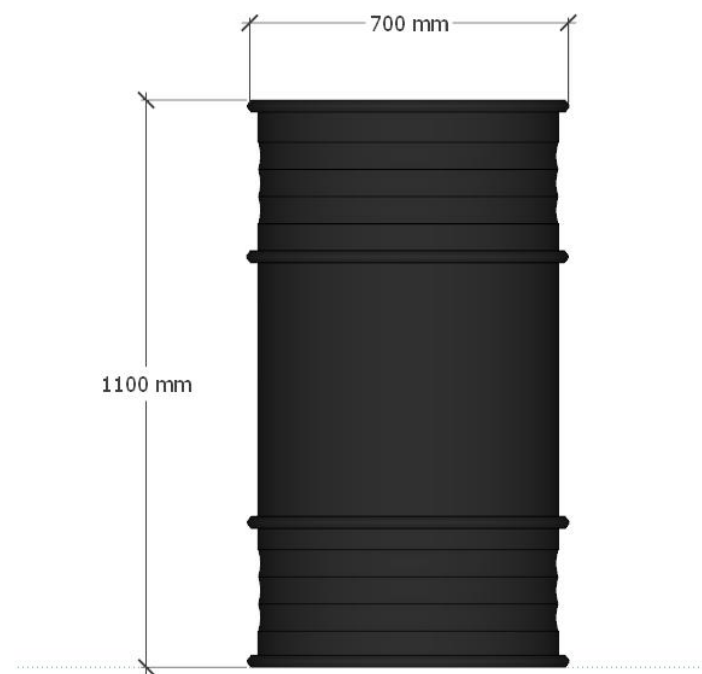


KEY VISUAL ELEMENTS AND USAGE GUIDELIN

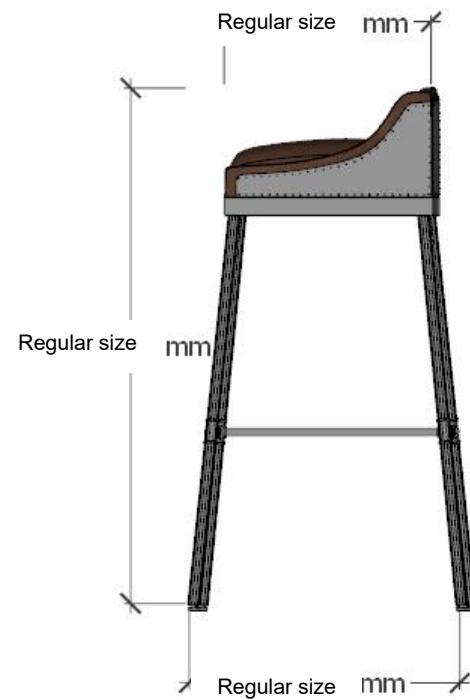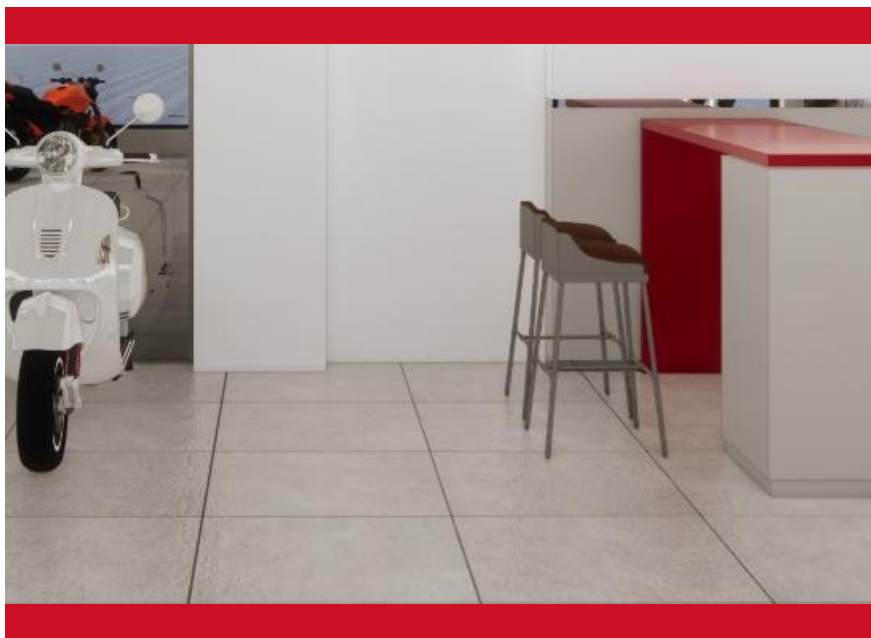





KEY VISUAL ELEMENTS AND USAGE GUIDELIN

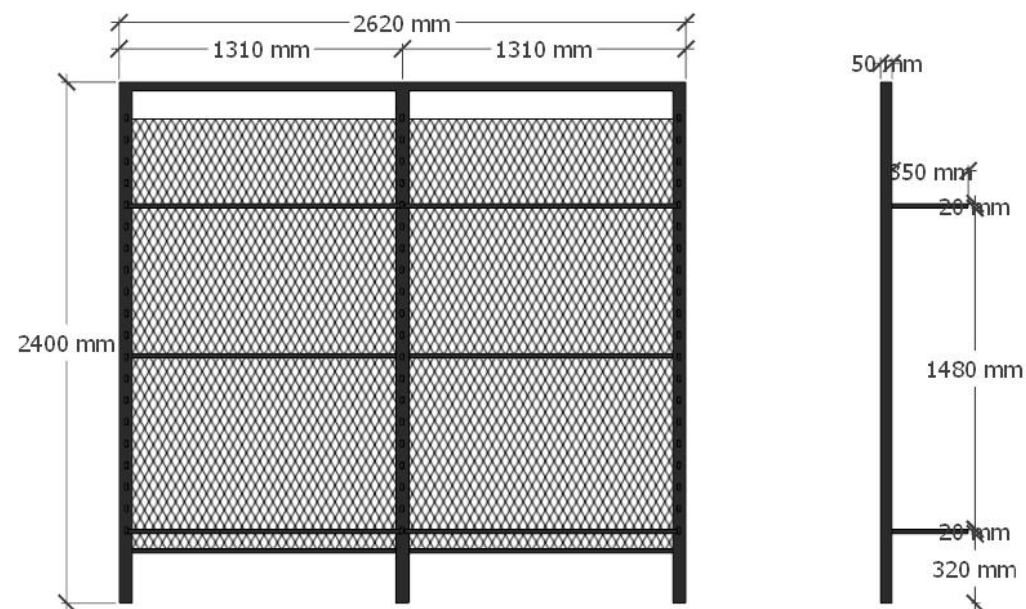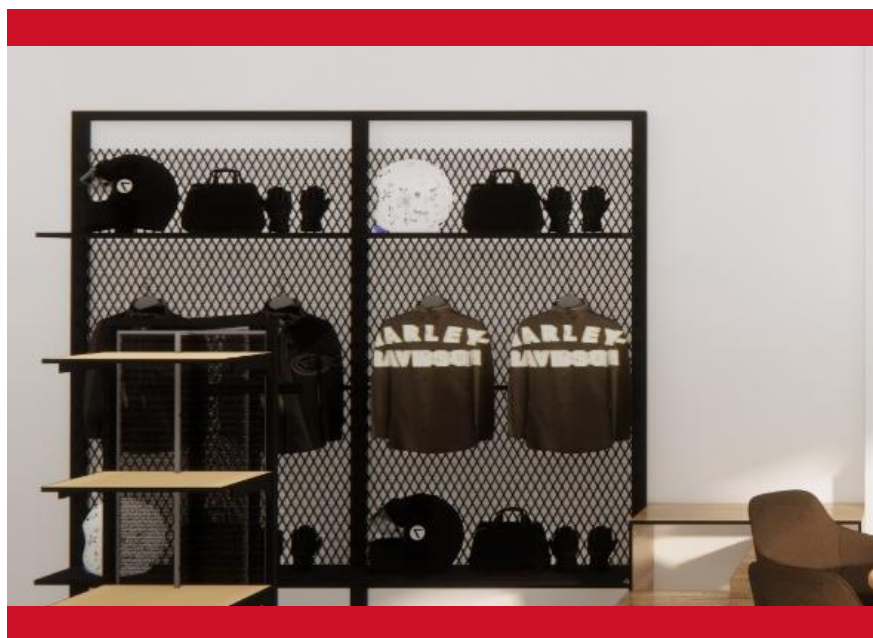





KEY VISUAL ELEMENTS AND USAGE GUIDELIN

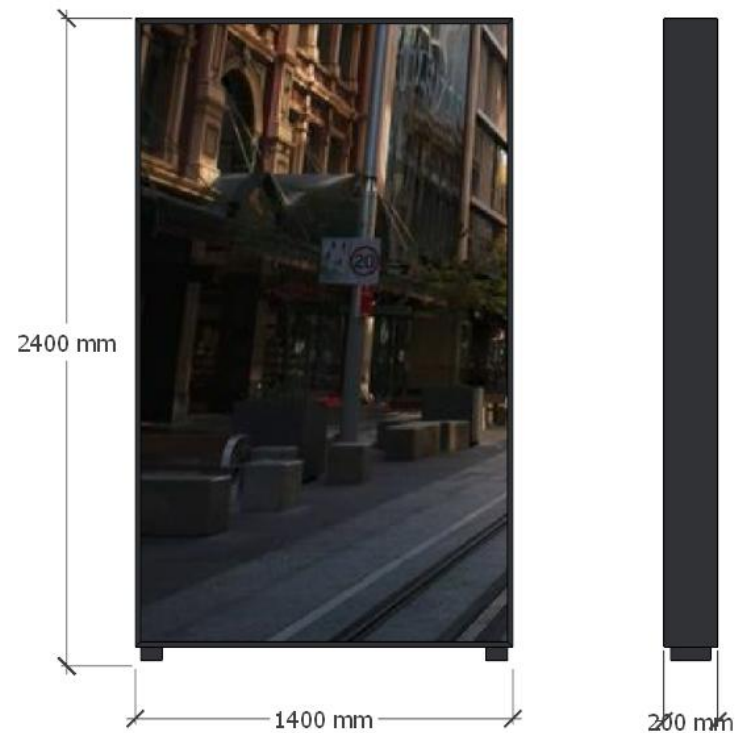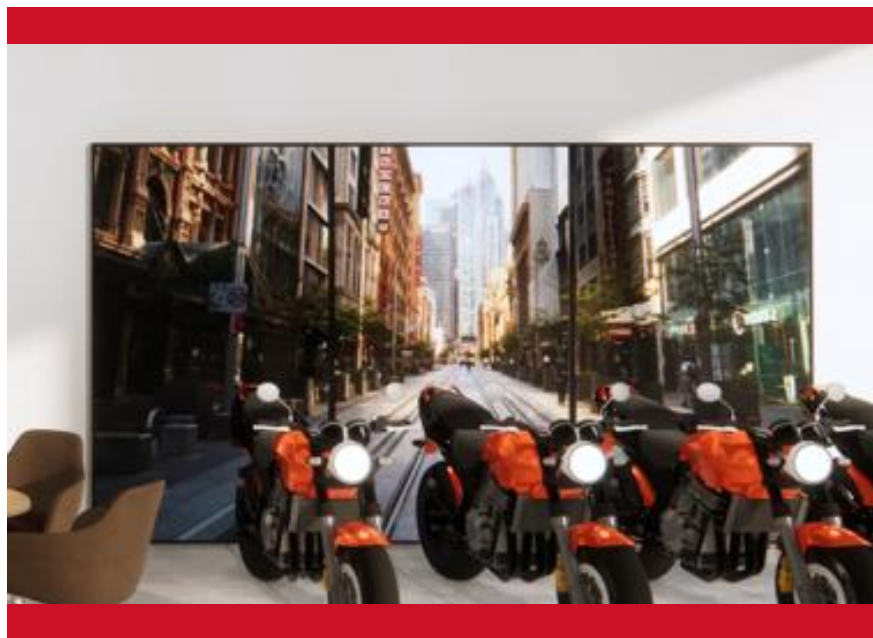



KEY VISUAL ELEMENTS AND USAGE GUIDELIN

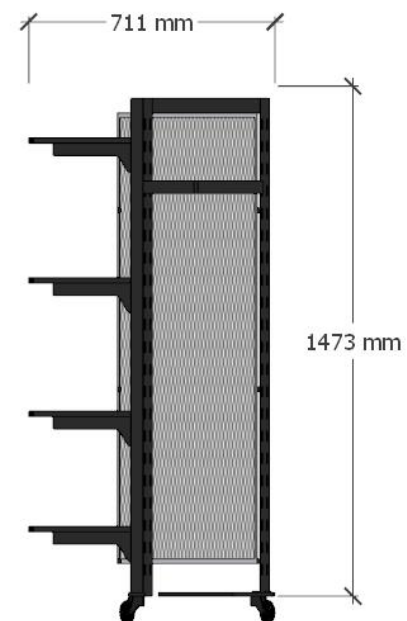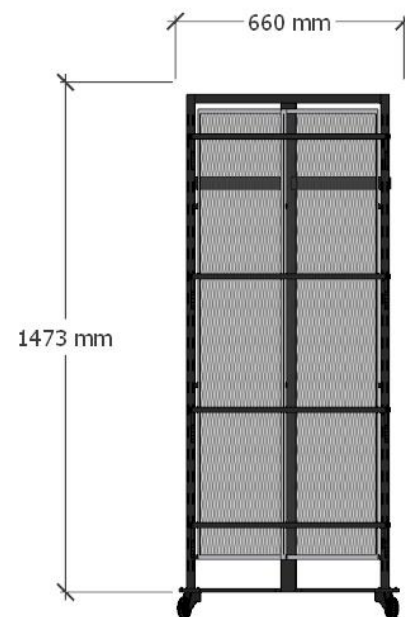

KEY VISUAL ELEMENTS AND USAGE GUIDELIN



KEY VISUAL ELEMENTS AND USAGE GUIDELIN





KEY VISUAL ELEMENTS AND USAGE GUIDELIN





KEY VISUAL ELEMENTS AND USAGE GUIDELIN





KEY VISUAL ELEMENTS AND USAGE GUIDELIN





QJMOTOR J-store
standard shop design

QJMOTOR J Store - Standard Store

KEY VISUAL ELEMENTS AND USAGE GUIDELIN



KEY VISUAL ELEMENTS AND USAGE GUIDELIN




KEY VISUAL ELEMENTS AND USAGE GUIDELIN






KEY VISUAL ELEMENTS AND USAGE GUIDELIN

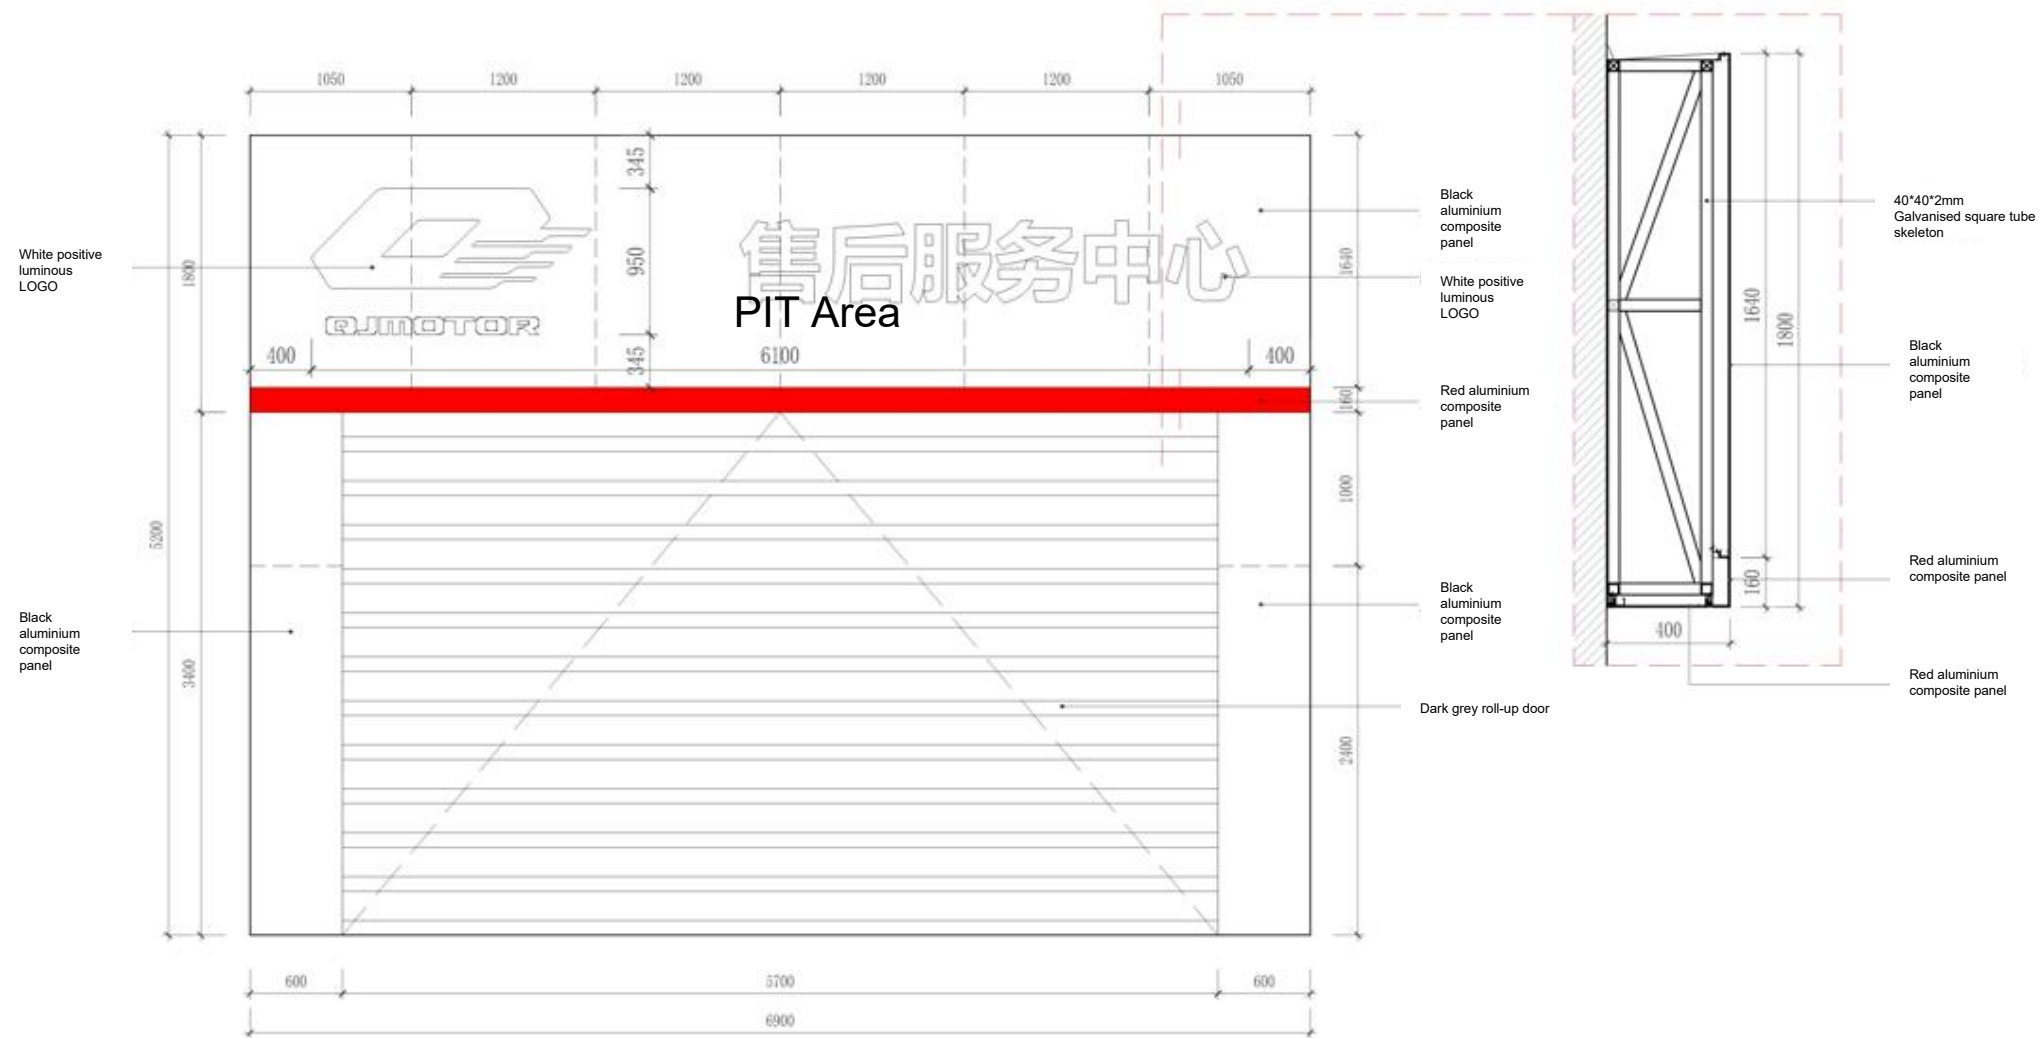



KEY VISUAL ELEMENTS AND USAGE GUIDELIN

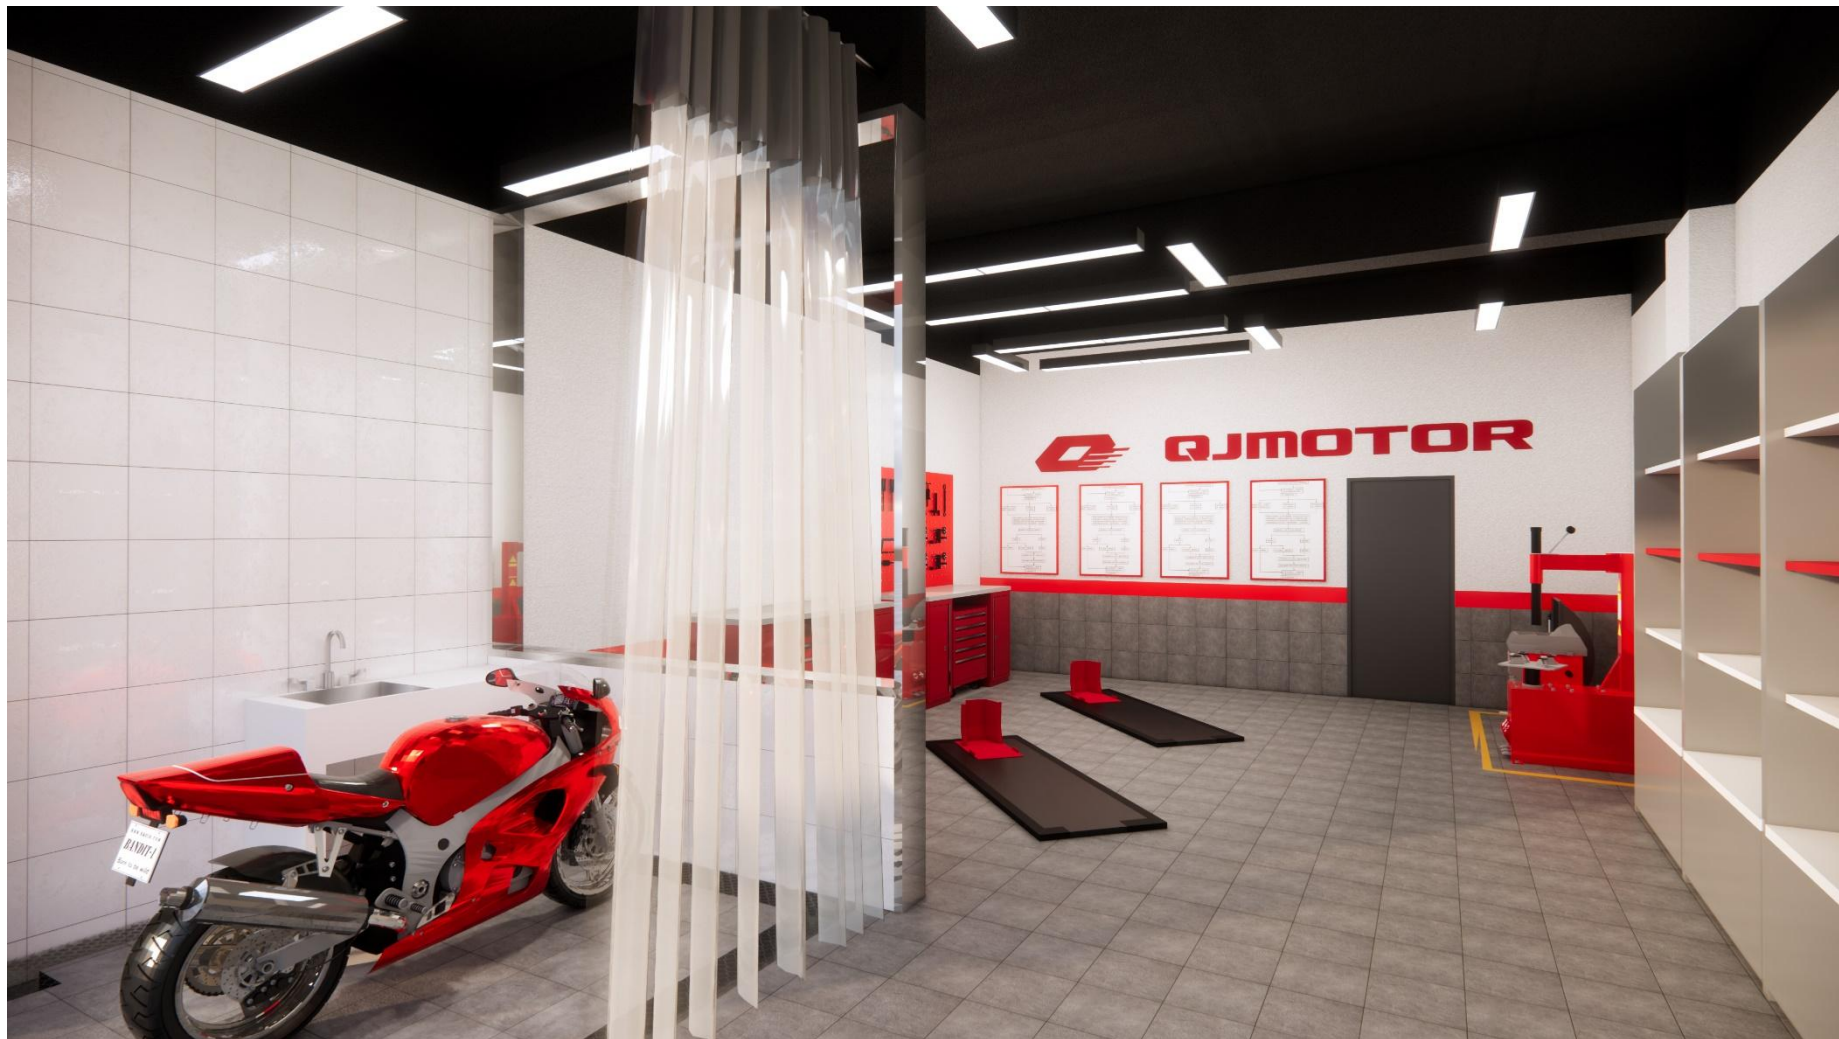





KEY VISUAL ELEMENTS AND USAGE GUIDELIN



KEY VISUAL ELEMENTS AND USAGE GUIDELIN

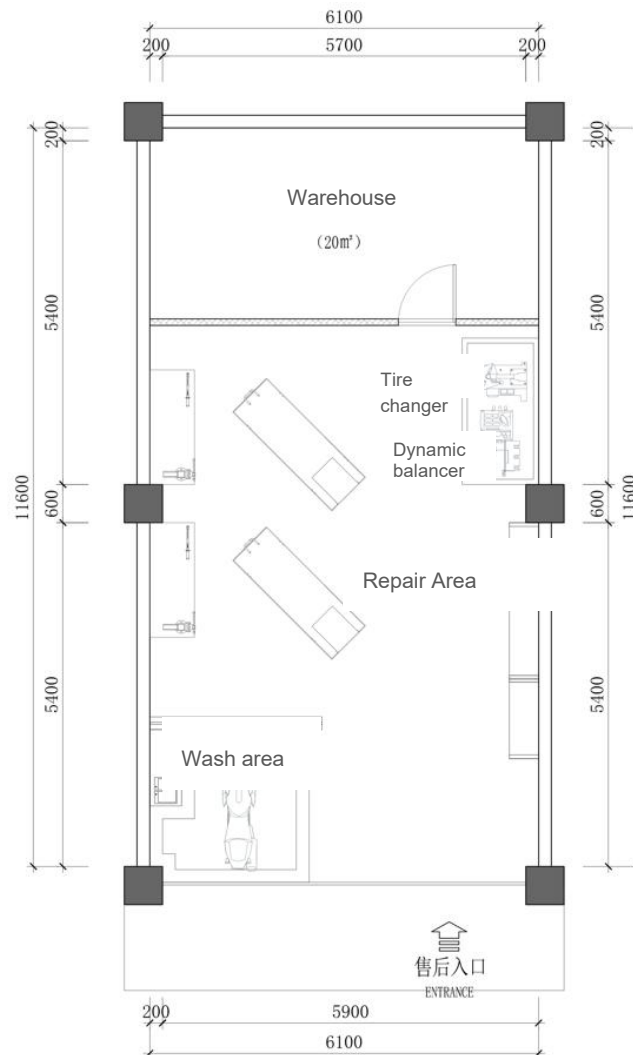


KEY VISUAL ELEMENTS AND USAGE GUIDELIN

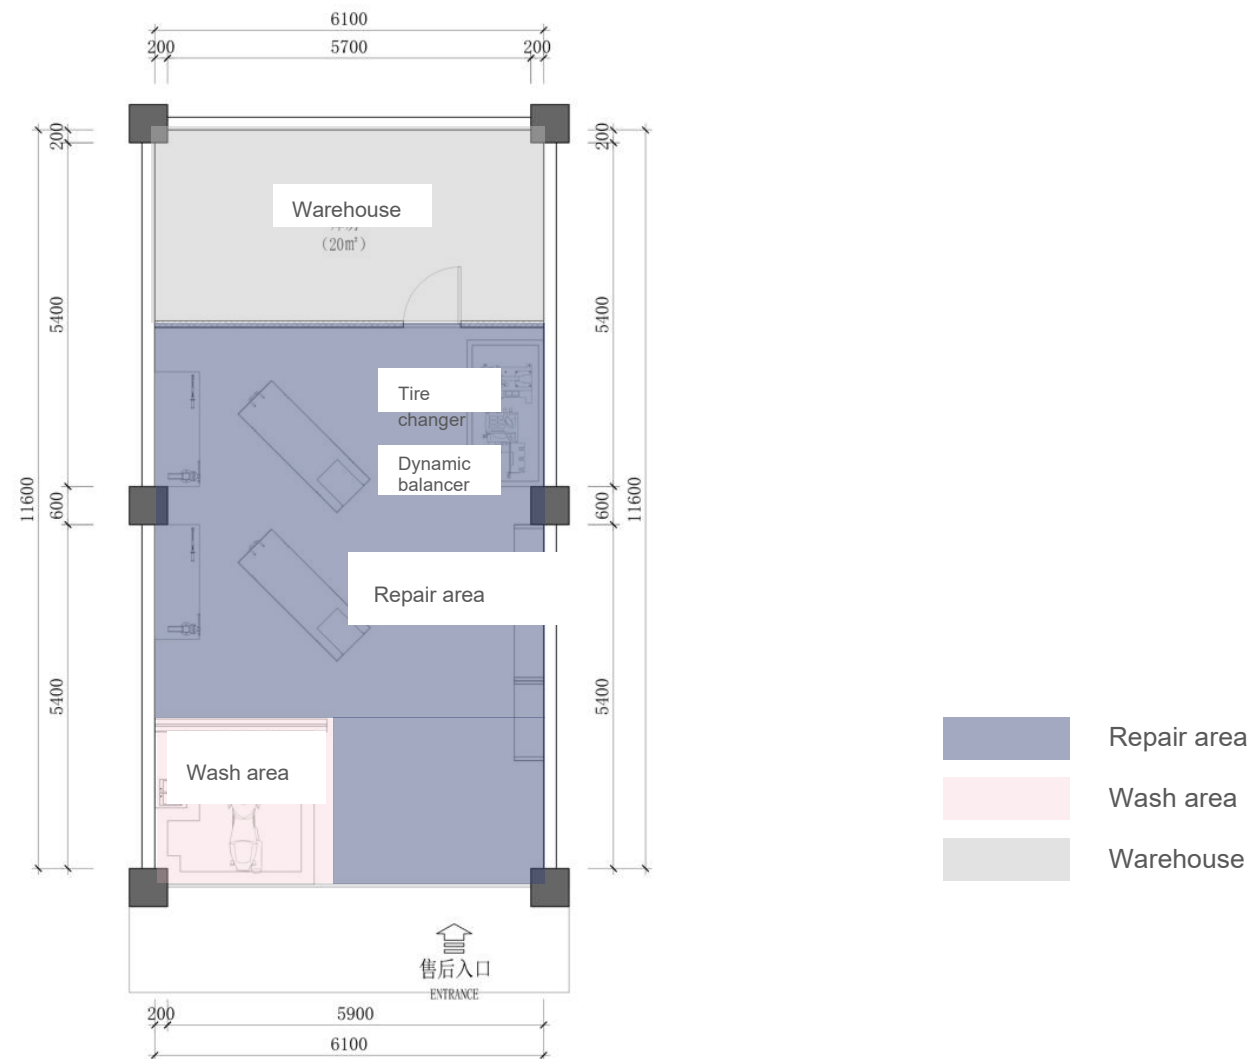




KEY VISUAL ELEMENTS AND USAGE GUIDELIN

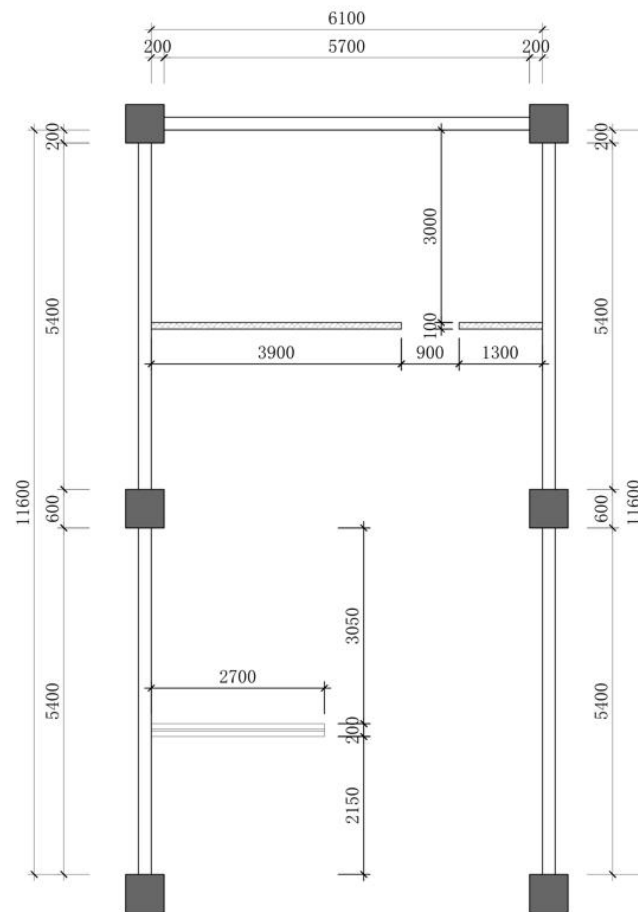

Legend	Name
	Load-bearing
	Walls of the original
	Newly constructed walls




KEY VISUAL ELEMENTS AND USAG

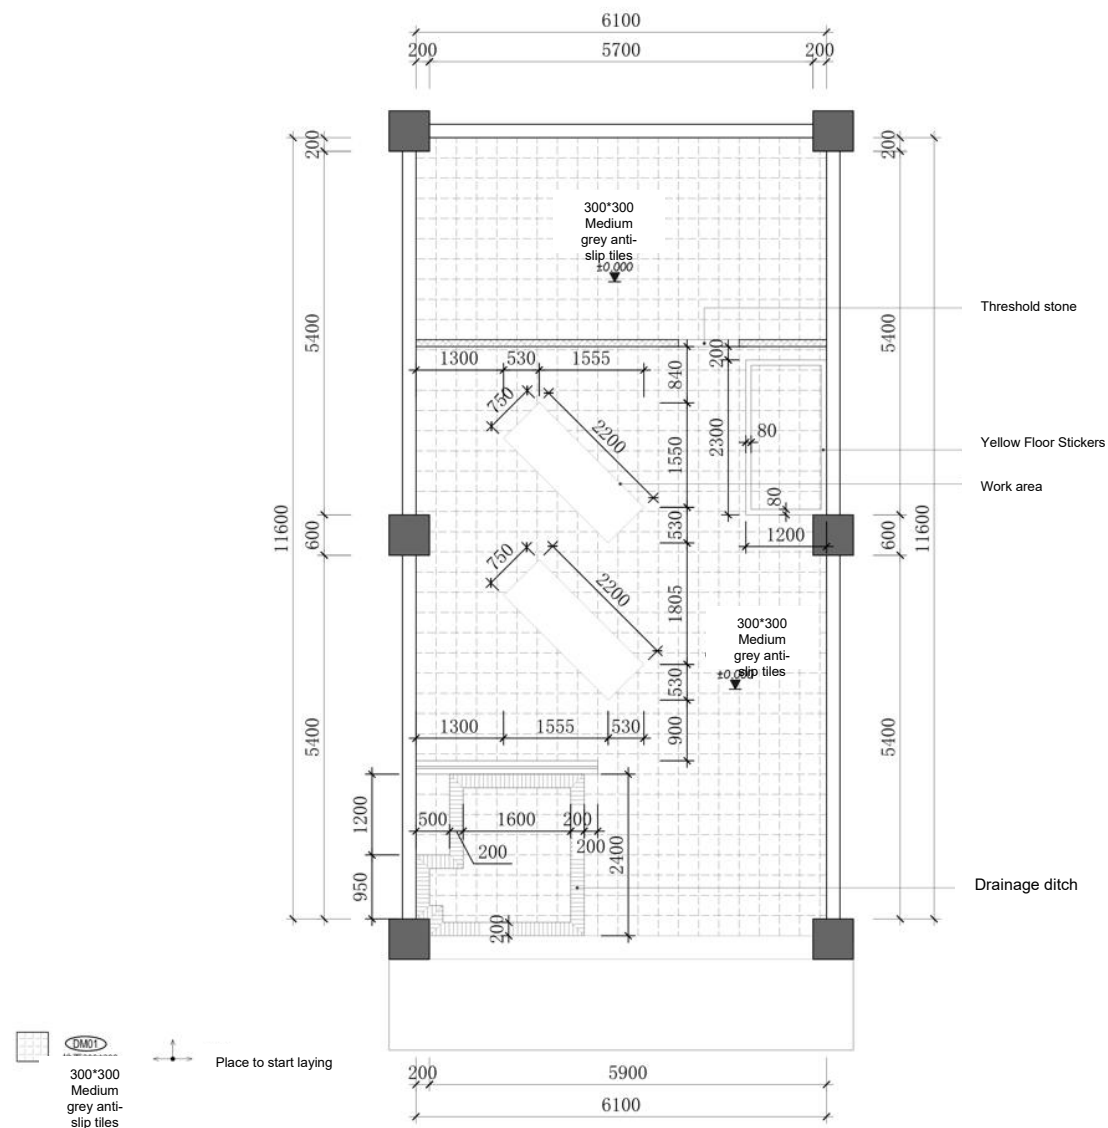



KEY VISUAL ELEMENTS AND USAGE GUIDELIN

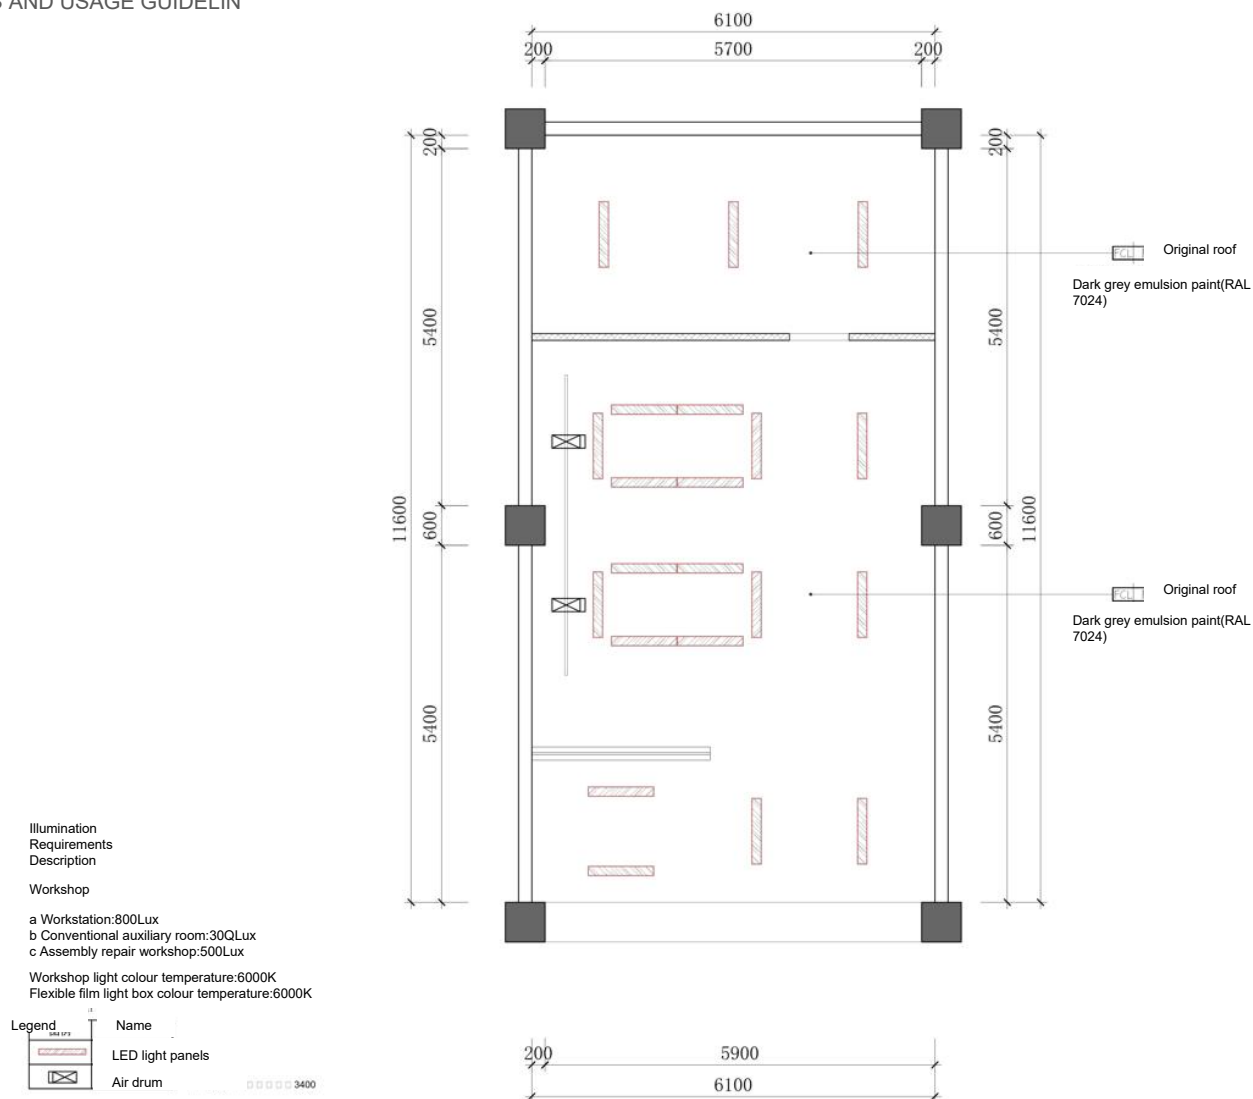



KEY VISUAL ELEMENTS AND USAGE GUIDELIN

Illumination
Requirements
Description

Workshop

a Workstation:800Lux

b Conventional auxiliary room:30QLux

c Assembly repair workshop:500Lux

Workshop light colour temperature:6000K


Flexible film light box colour temperature:6000K

Legend

Name

LED light panels



Air drum

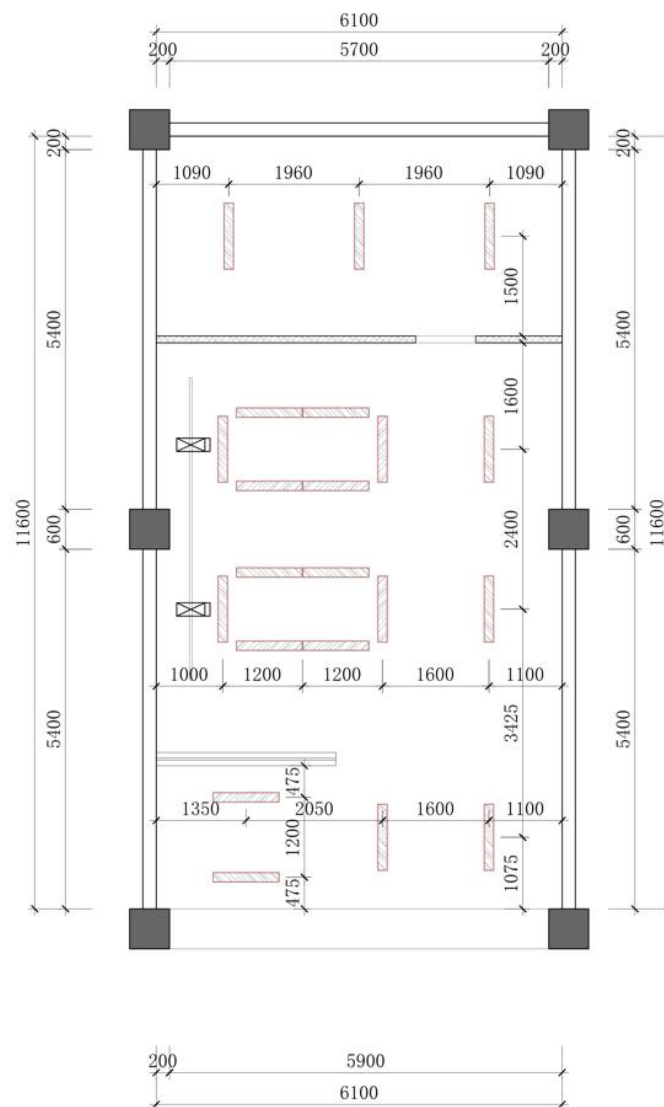




KEY VISUAL ELEMENTS AND USAGE GUIDELIN

1. The location and quantity of sockets should be constructed according to the local deepening design drawings.
2. All drawing dimensions are for reference only; strong and weak power point location map to the local deepening design drawings for the final construction basis
3. Please refer to the legend for the height of all power sockets unless otherwise specified.
4. Unless otherwise specified, all power sockets are 300 high.
5. The distance between the strong and weak power socket box is 100 wide.

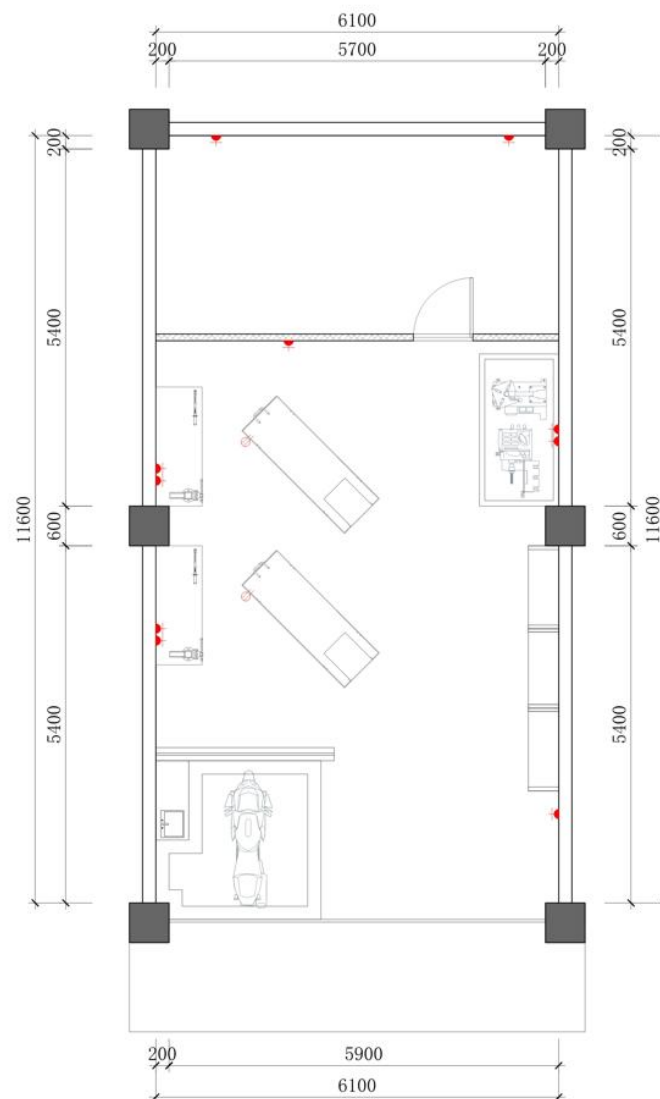





KEY VISUAL ELEMENTS AND USAGE GUIDELIN


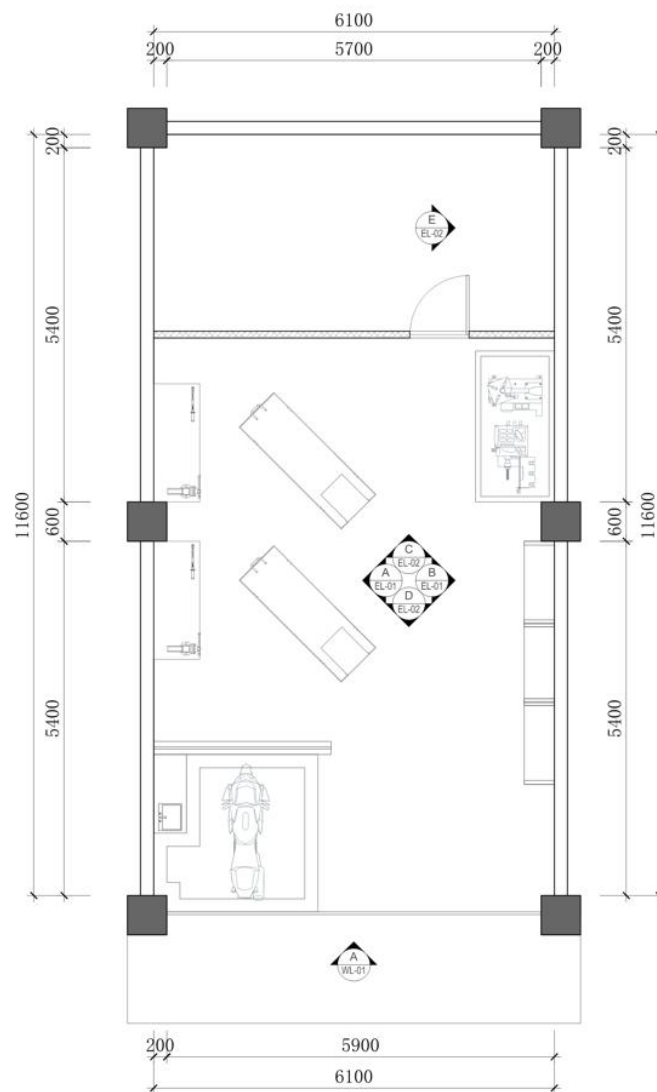


KEY VISUAL ELEMENTS AND USAGE GUIDELIN

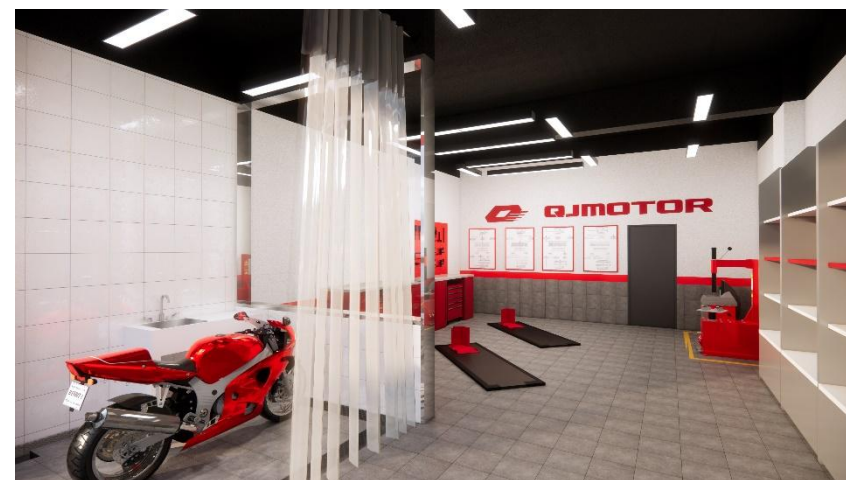
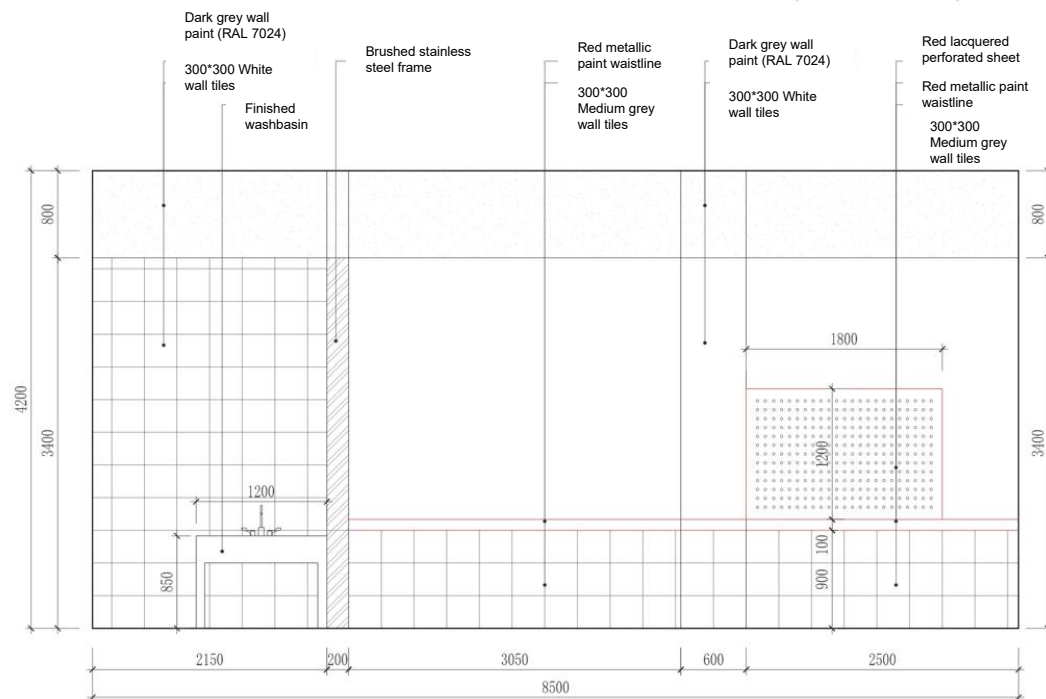




KEY VISUAL ELEMENTS AND USAGE GUIDELIN

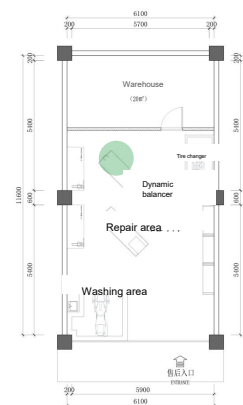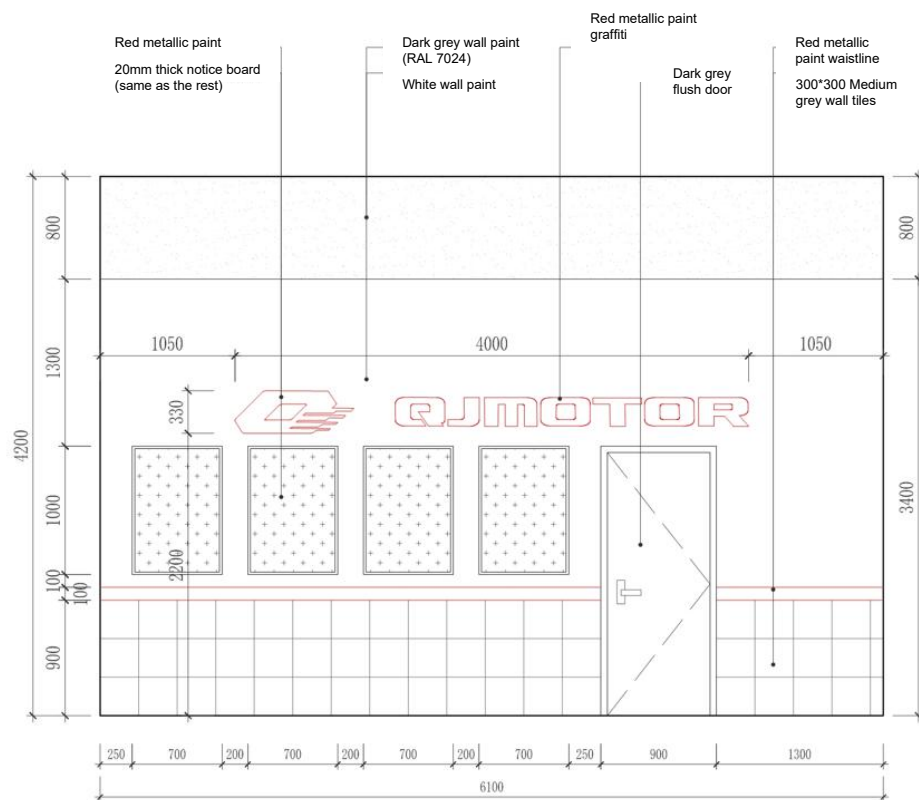

KEY VISUAL ELEMENTS AND USAGE GUIDELIN

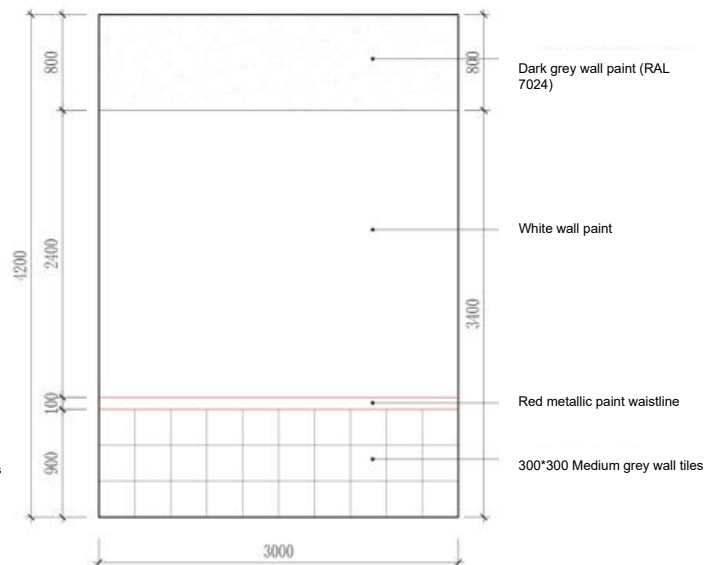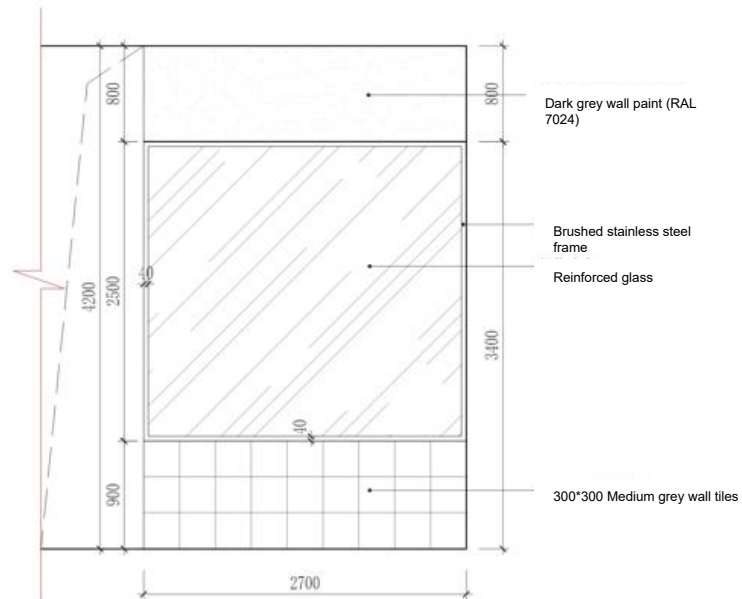



QJMOTOR R-store
standard shop design

QJMOTOR R Store - Standard Store

KEY VISUAL ELEMENTS AND USAGE GUIDELIN






KEY VISUAL ELEMENTS AND USAGE GUIDELIN





KEY VISUAL ELEMENTS AND USAGE GUIDELIN

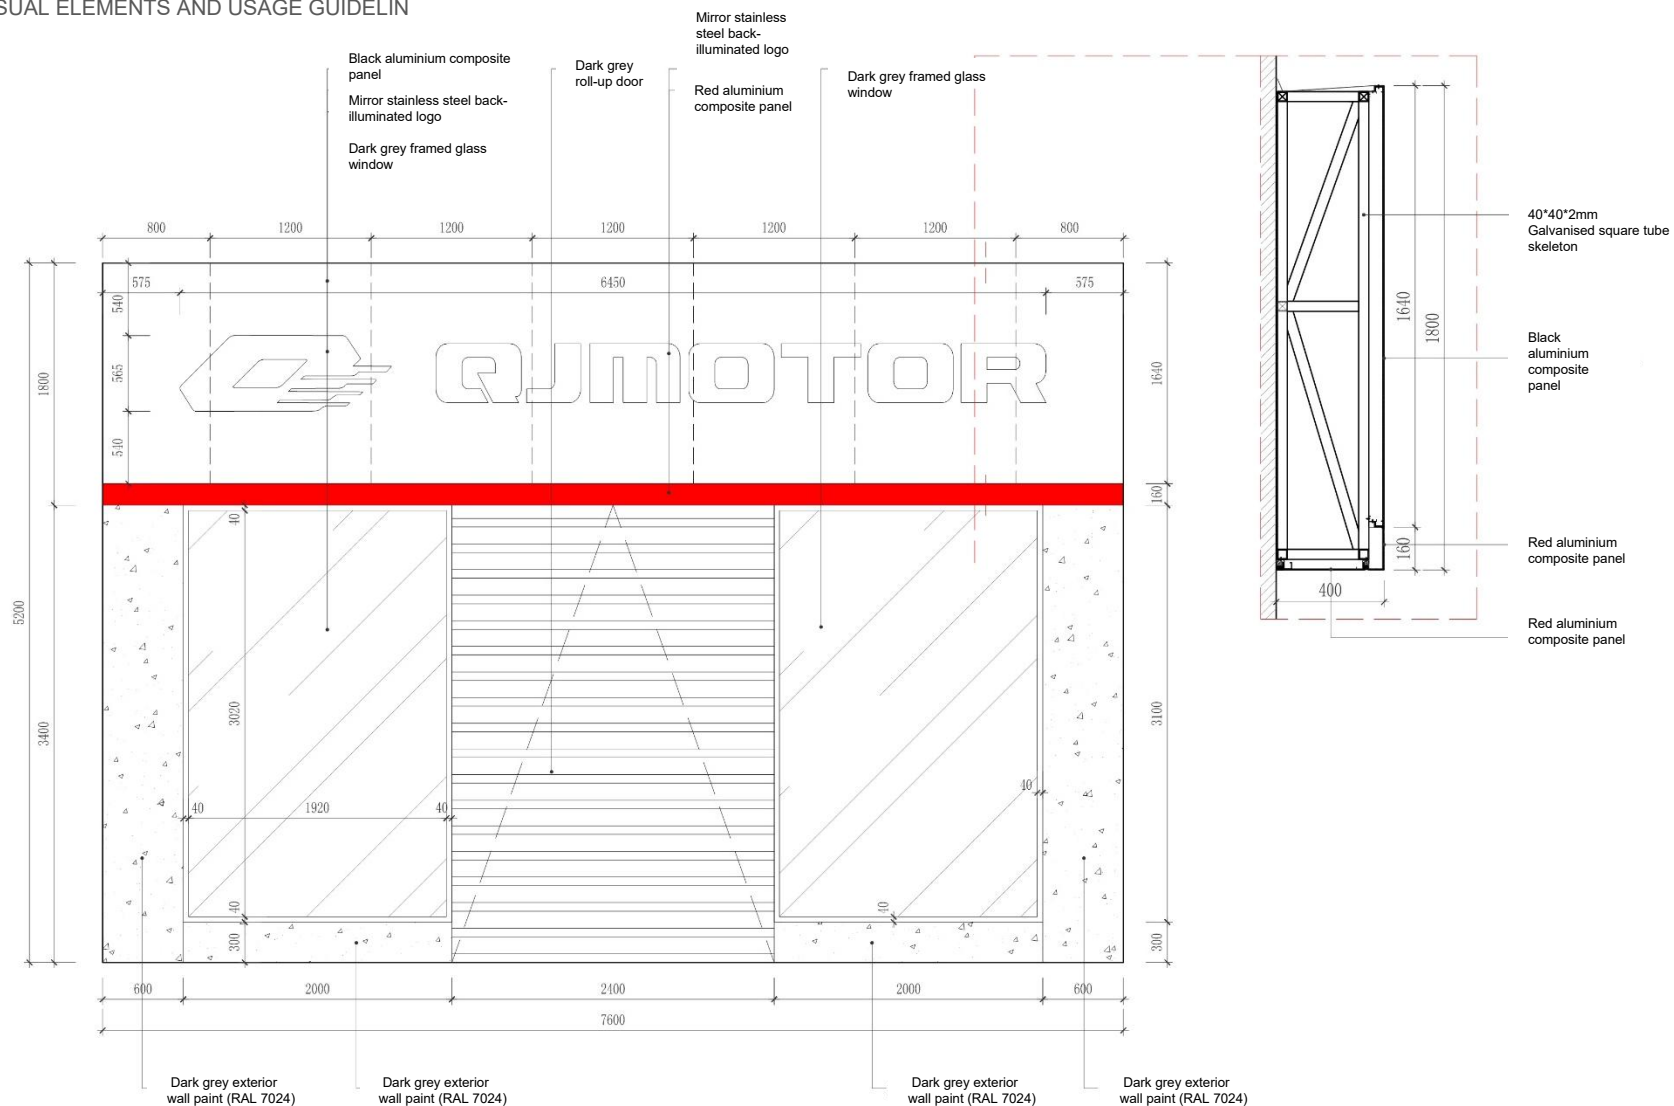



KEY VISUAL ELEMENTS AND USAGE GUIDELIN





KEY VISUAL ELEMENTS AND USAGE GUIDELIN






KEY VISUAL ELEMENTS AND USAGE GUIDELIN







KEY VISUAL ELEMENTS AND USAGE GUIDELIN

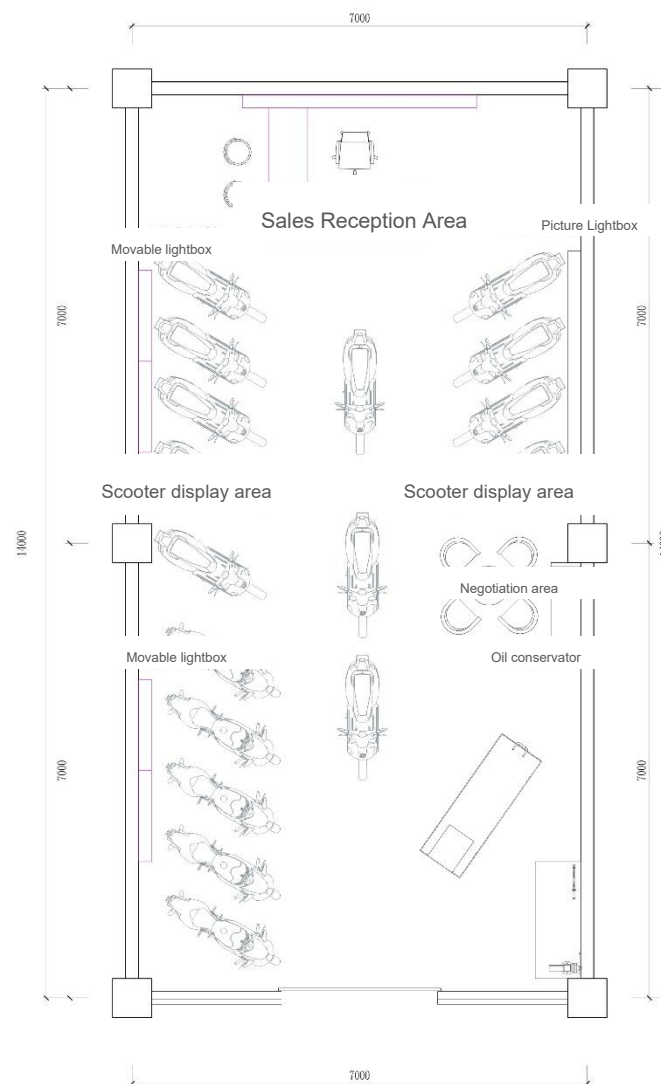




KEY VISUAL ELEMENTS AND USAGE GUIDELIN

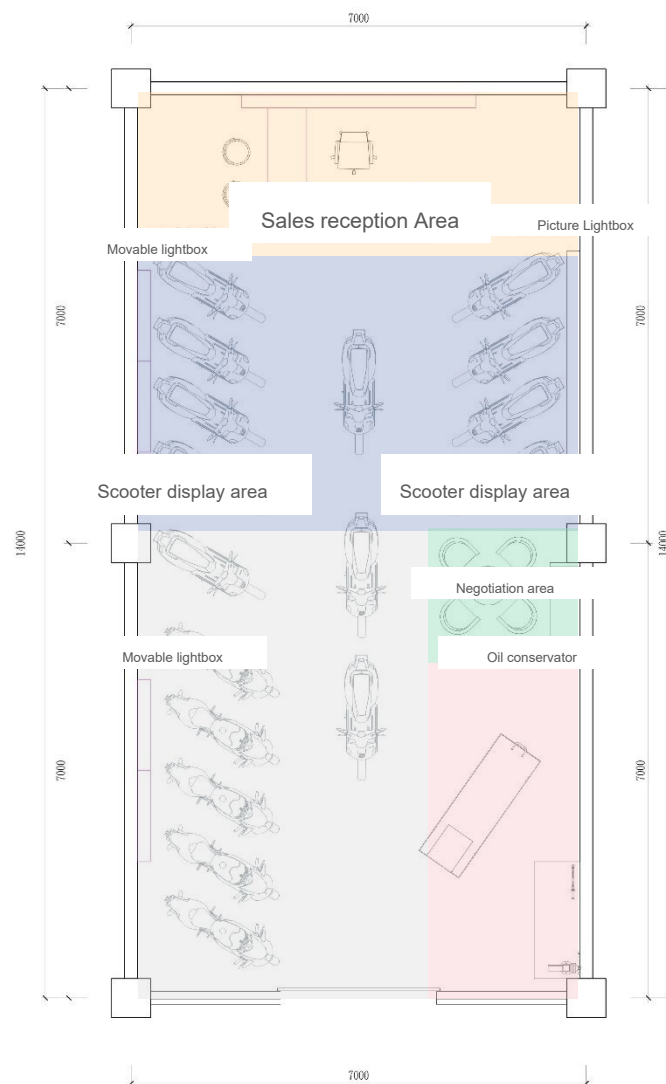


-  Sales reception area
-  Negotiation area
-  Scooter display area
-  Motorbike display area
-  Motorbike maintenance area



KEY VISUAL ELEMENTS AND USAGE GUIDELIN

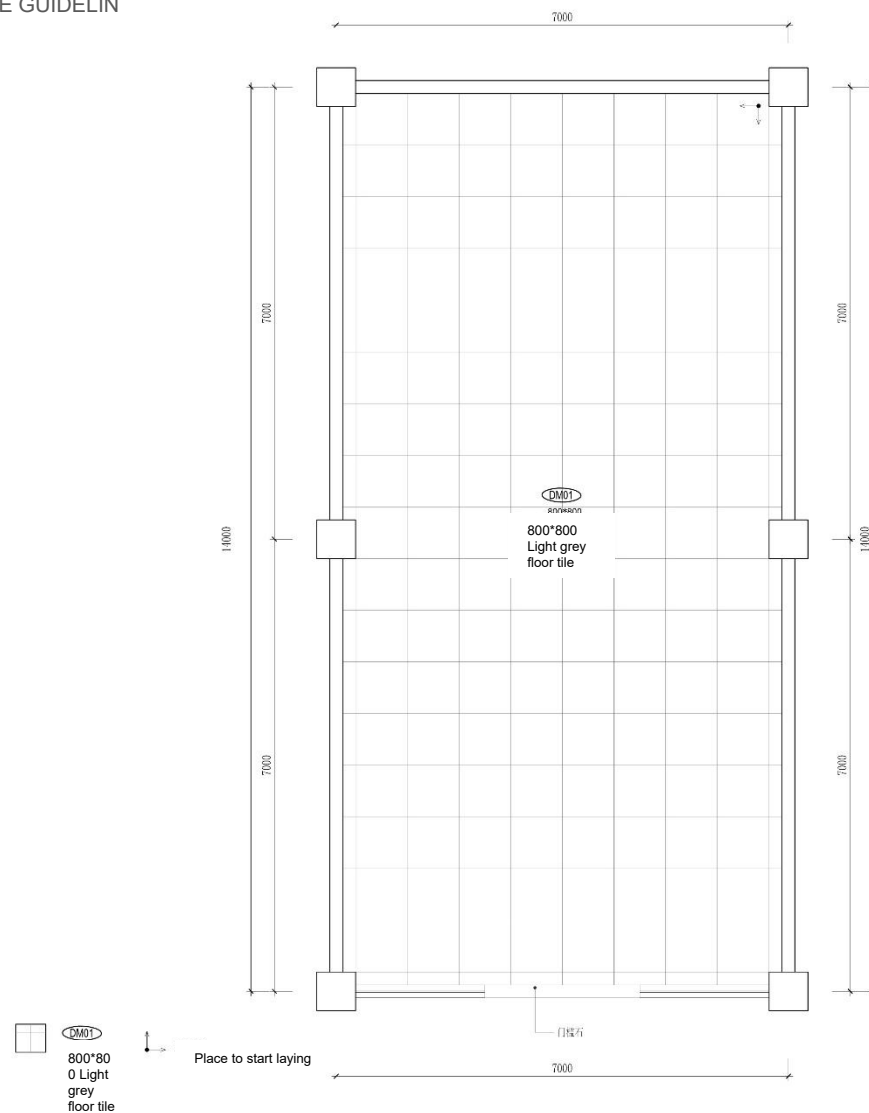


KEY VISUAL ELEMENTS AND USAGE GUIDELINES

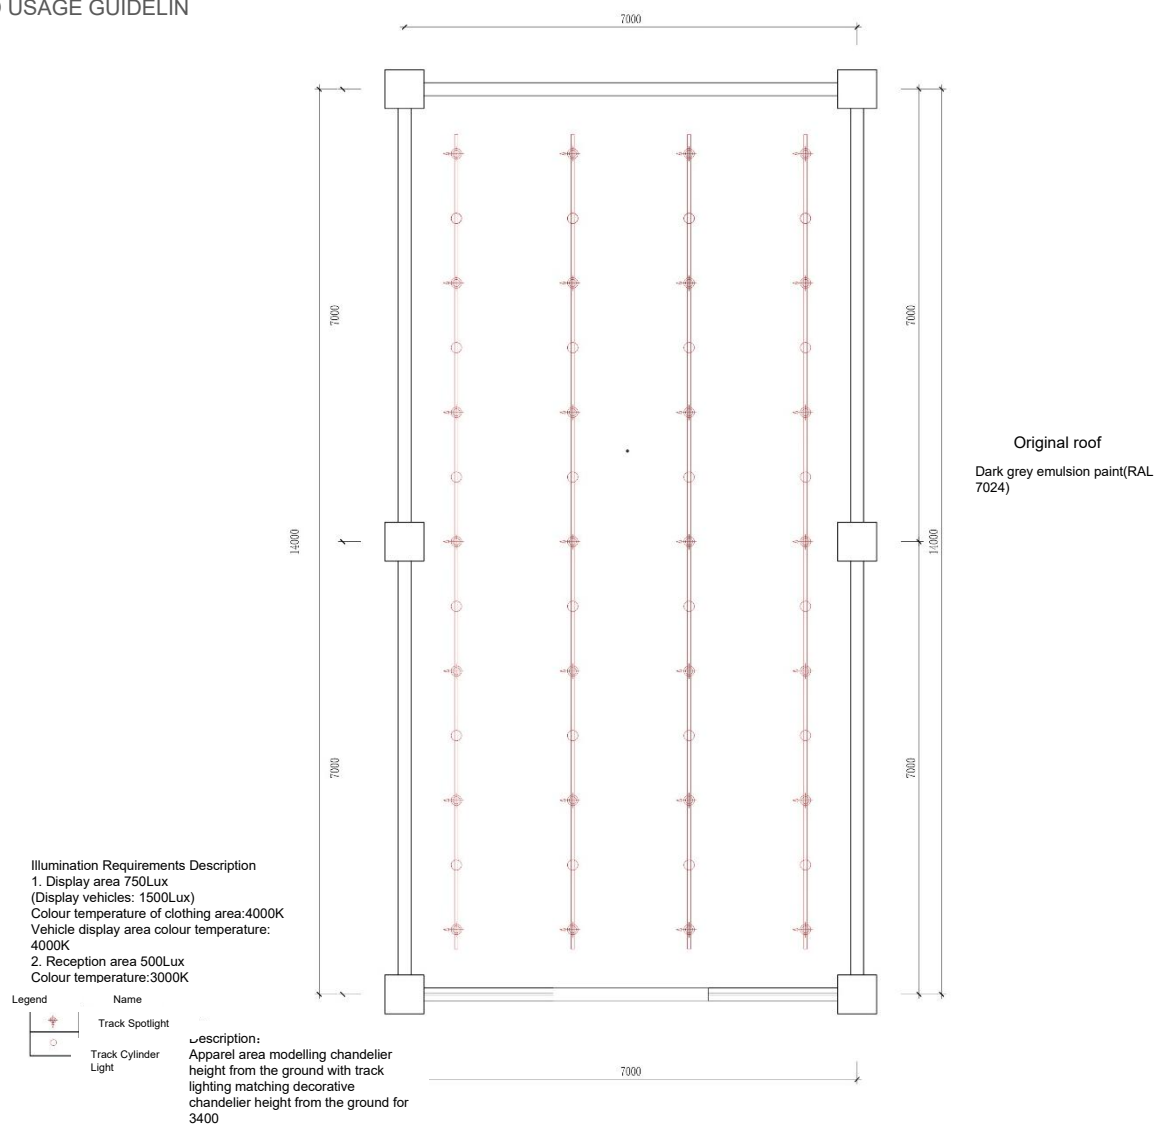



KEY VISUAL ELEMENTS AND USAGE GUIDELIN

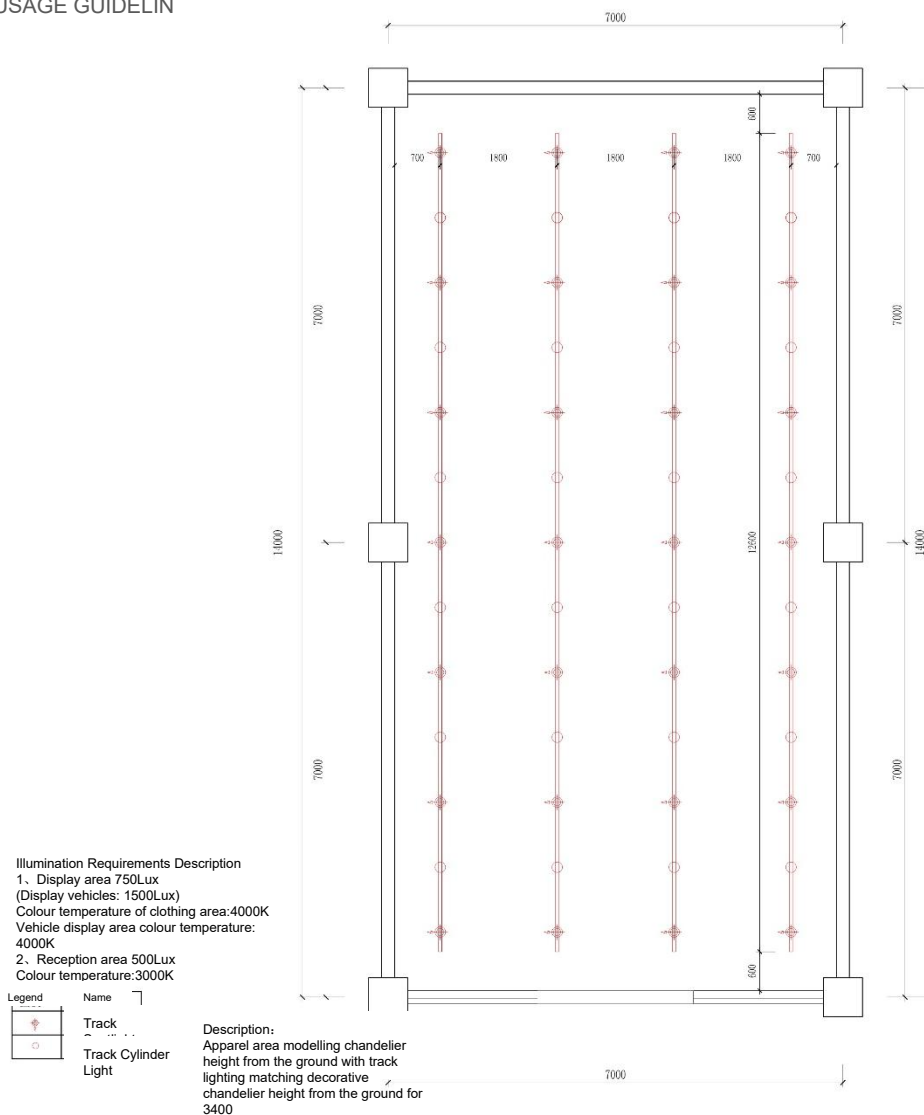




KEY VISUAL ELEMENTS AND USAGE GUIDELIN


1. The location and quantity of sockets should be constructed according to the local deepening design drawings.
2. All drawing dimensions are for reference only; strong and weak power point location map to the local deepening design drawings for the final construction basis
3. Please refer to the legend for the height of all power sockets unless otherwise specified.
4. Unless otherwise specified, all power sockets are 300 high.
5. The distance between the strong and weak power socket box is 100 wide.

	Two/three pole socket
	Two/Three Eyes Socket with Switch
	Junction box
	Floor socket
	Projection interface
	Audio Socket
	Mixed computer and telephone socket
	Telephone socket
	Wideband interface


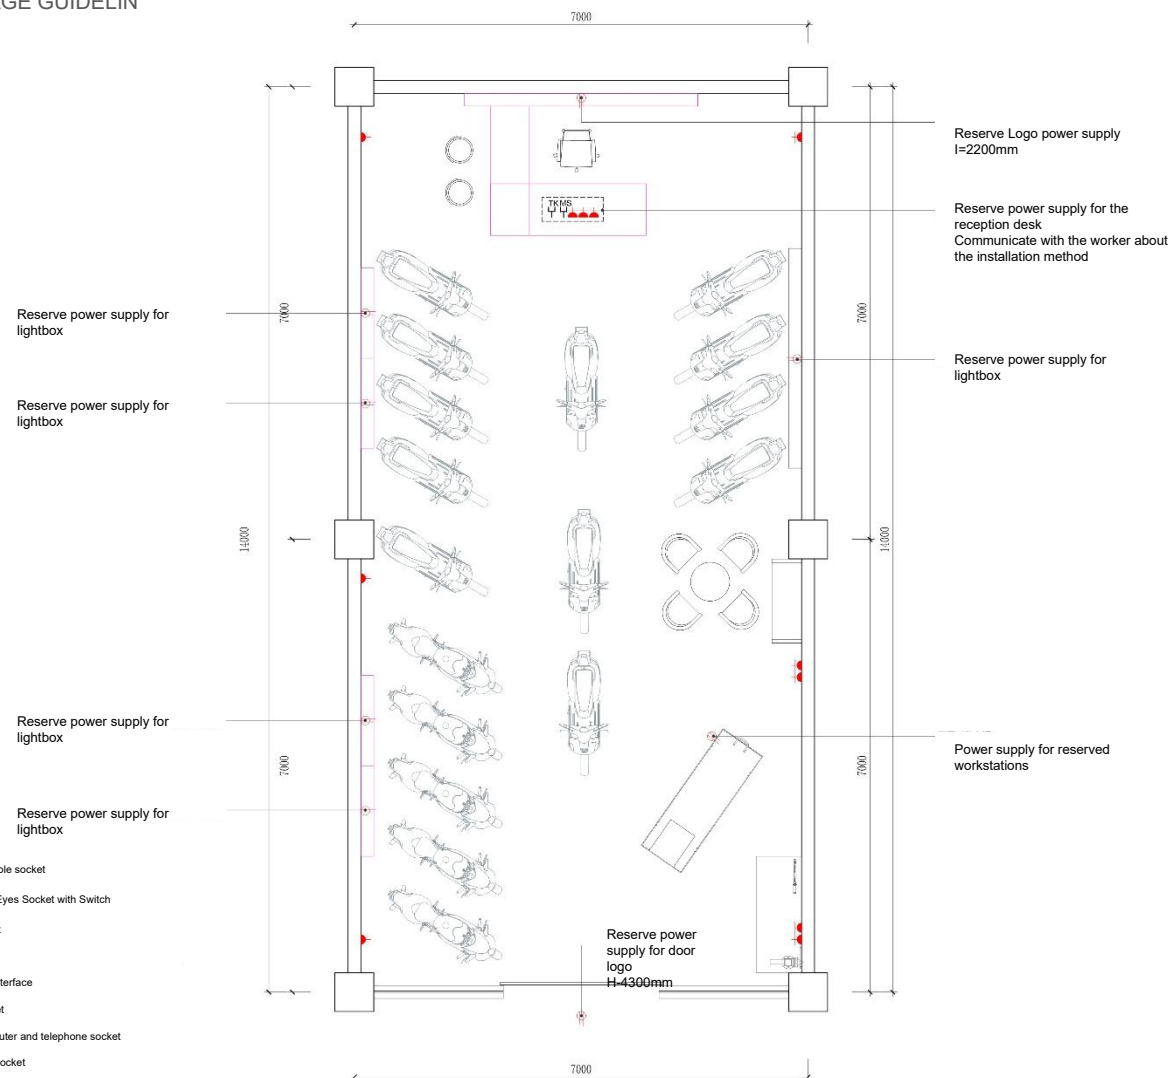






KEY VISUAL ELEMENTS AND USAGE GUIDELIN

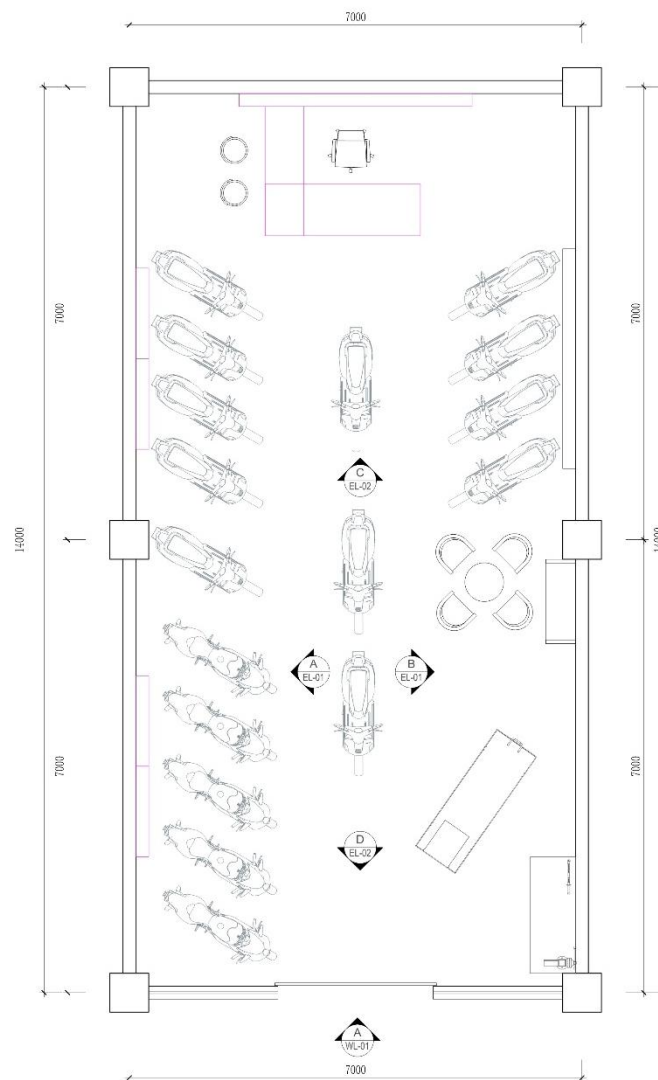



KEY VISUAL ELEMENTS AND USAGE GUIDELIN

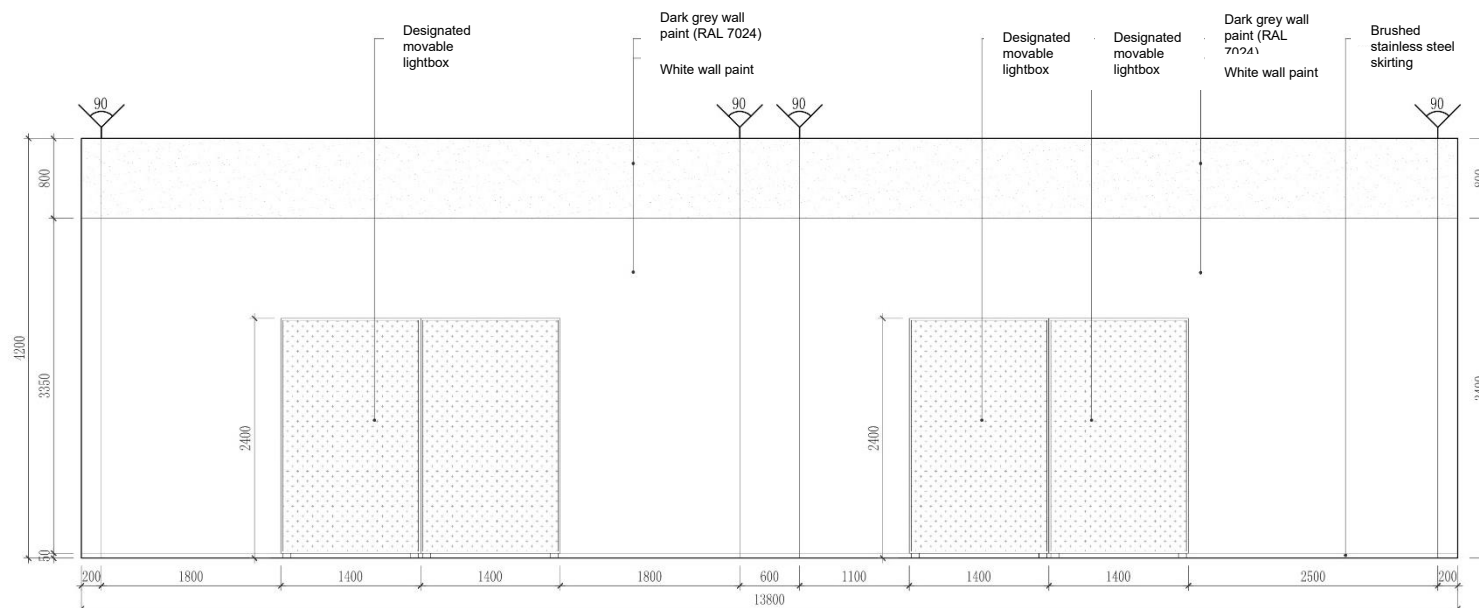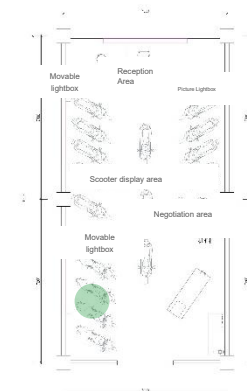

KEY VISUAL ELEMENTS AND USAGE GUIDELIN

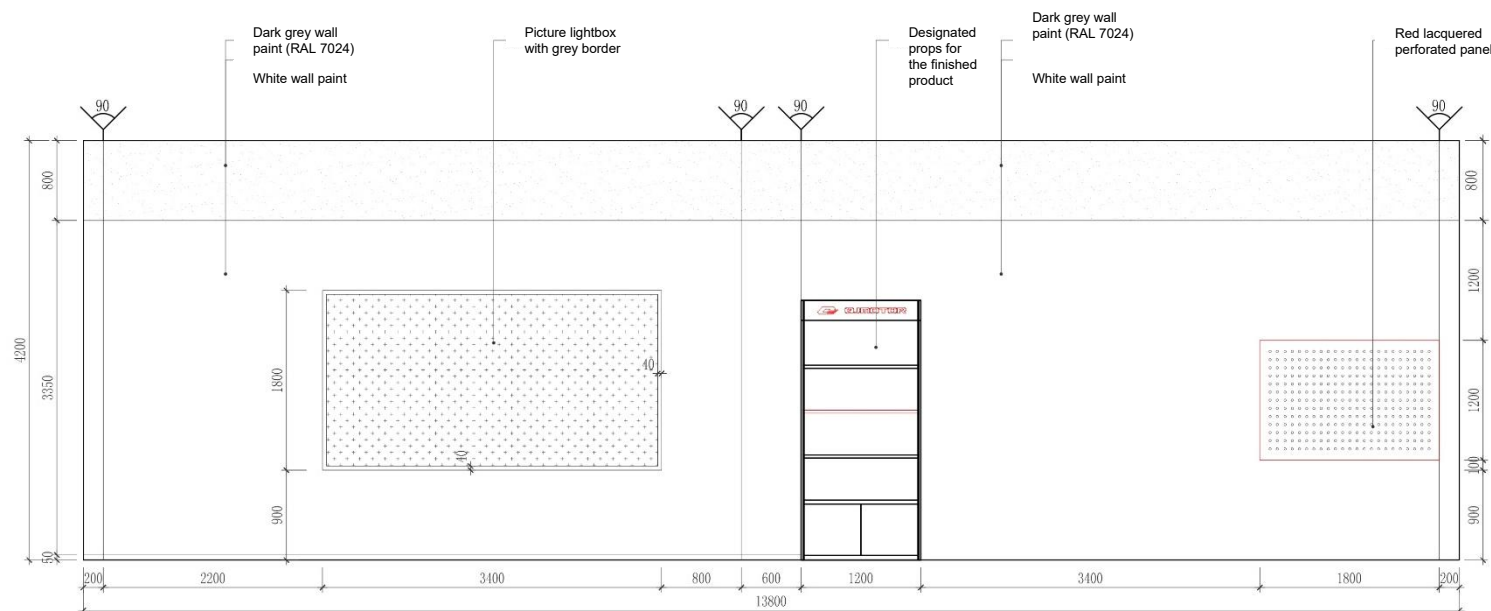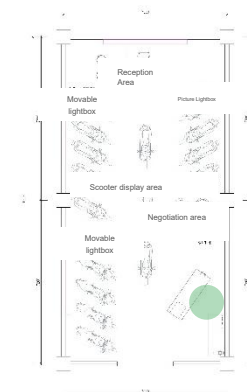


KEY VISUAL ELEMENTS AND USAGE GUIDELIN

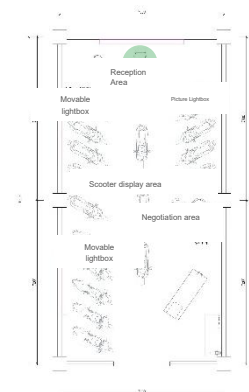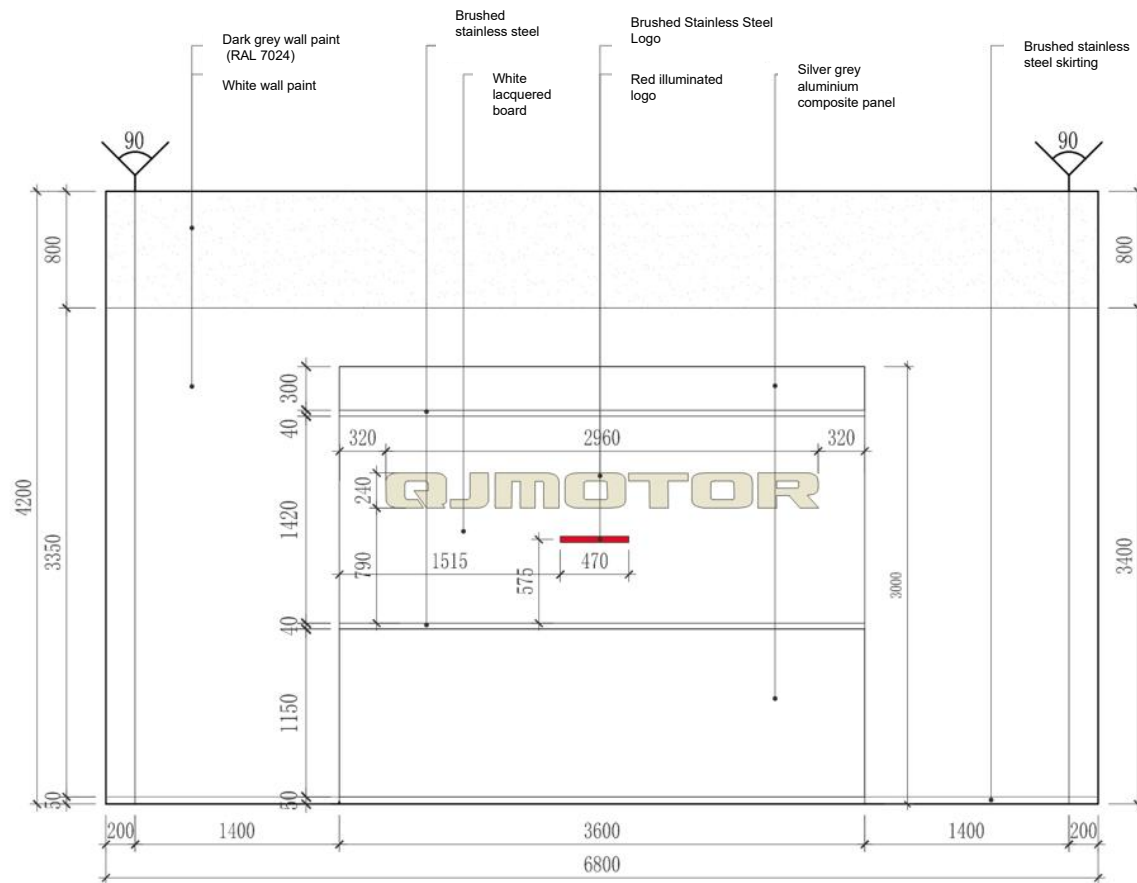




KEY VISUAL ELEMENTS AND USAGE GUIDELIN





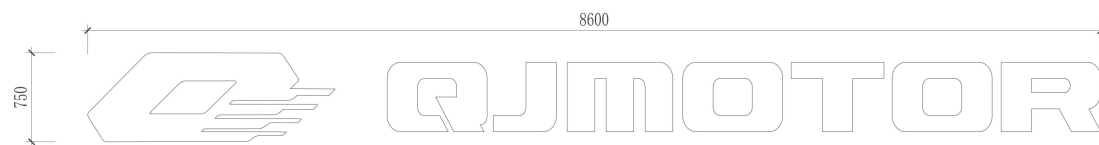




KEY VISUAL ELEMENTS AND USAGE GUIDELIN

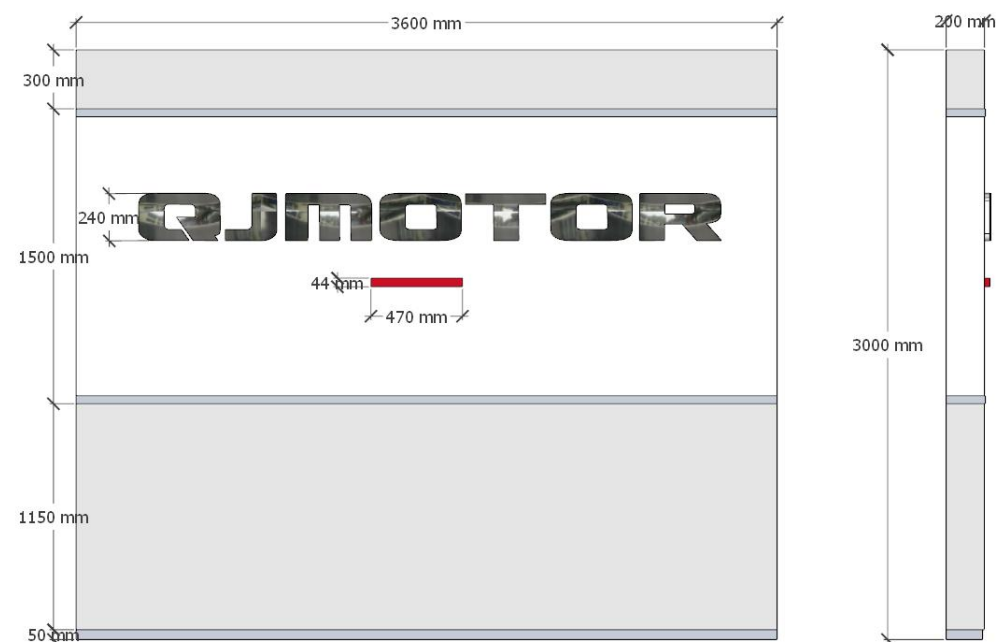


KEY VISUAL ELEMENTS AND USAGE GUIDELIN

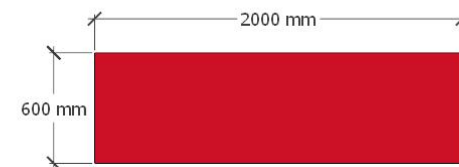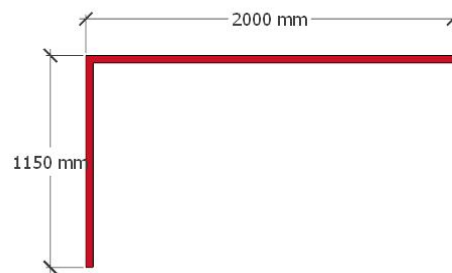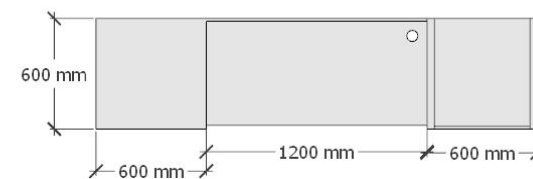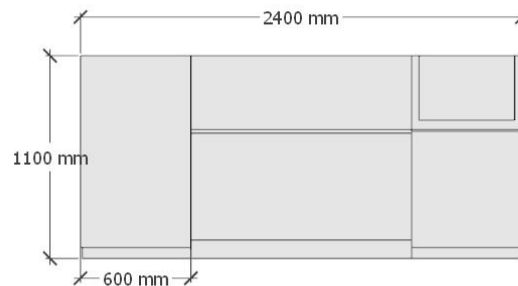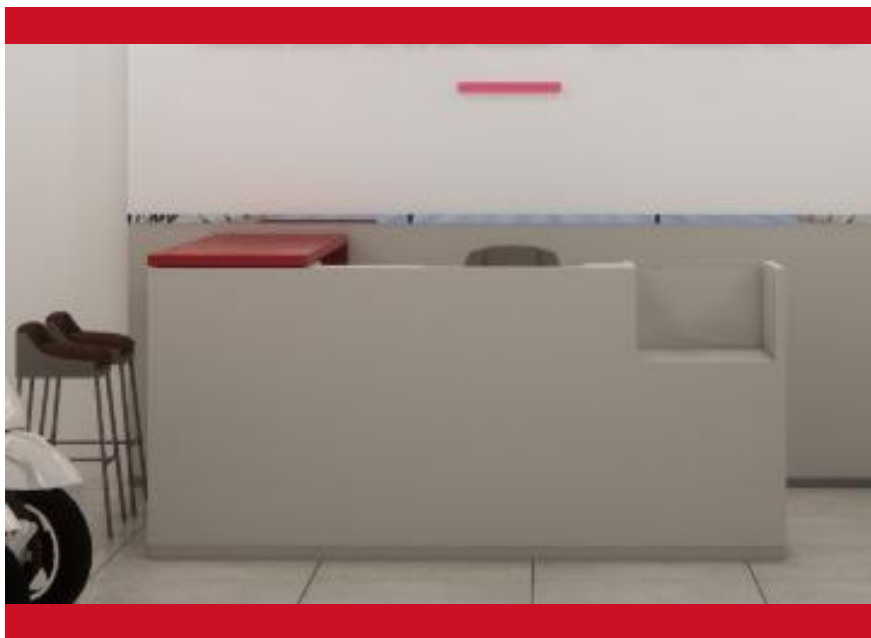




KEY VISUAL ELEMENTS AND USAGE GUIDELIN

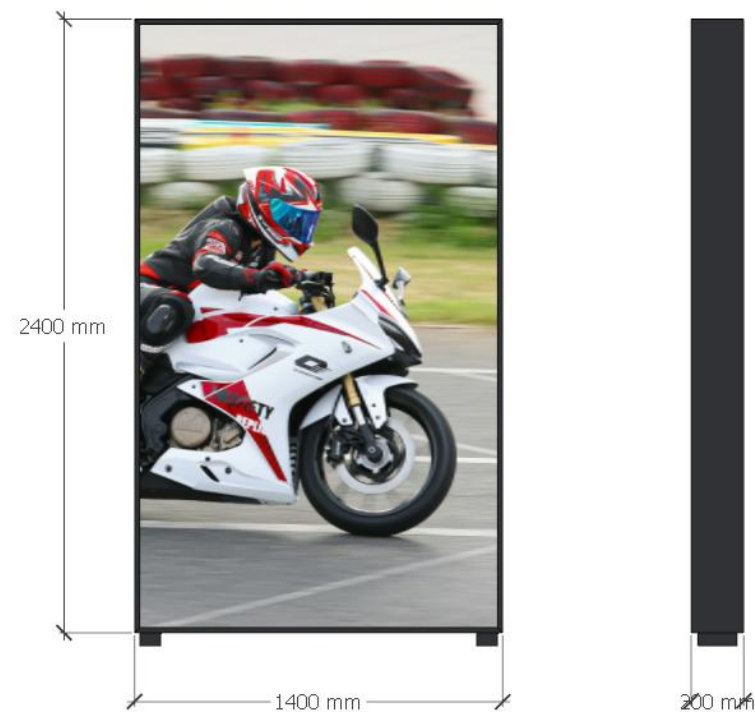



KEY VISUAL ELEMENTS AND USAGE GUIDELIN

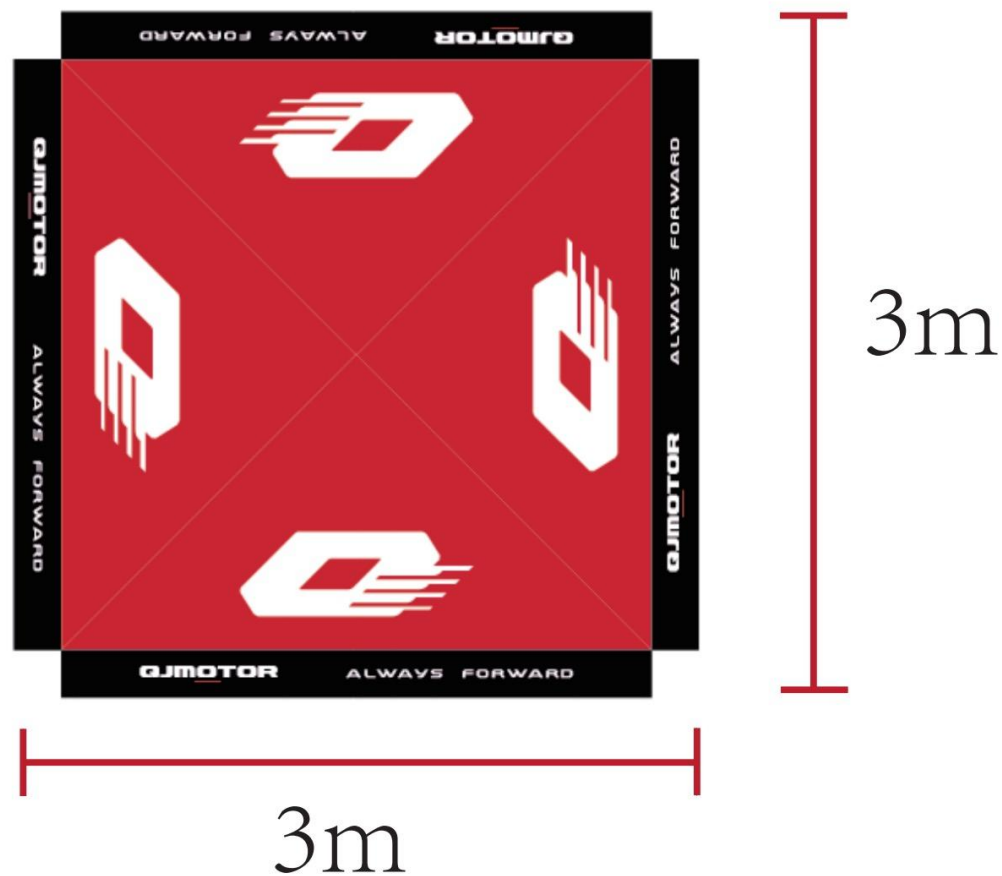



KEY VISUAL ELEMENTS AND USAGE GUIDELIN




340cm

Including the length of the telescopic pole, not the flag length

Actual proportional scaling



KEY VISUAL ELEMENTS AND USAGE GUIDELIN

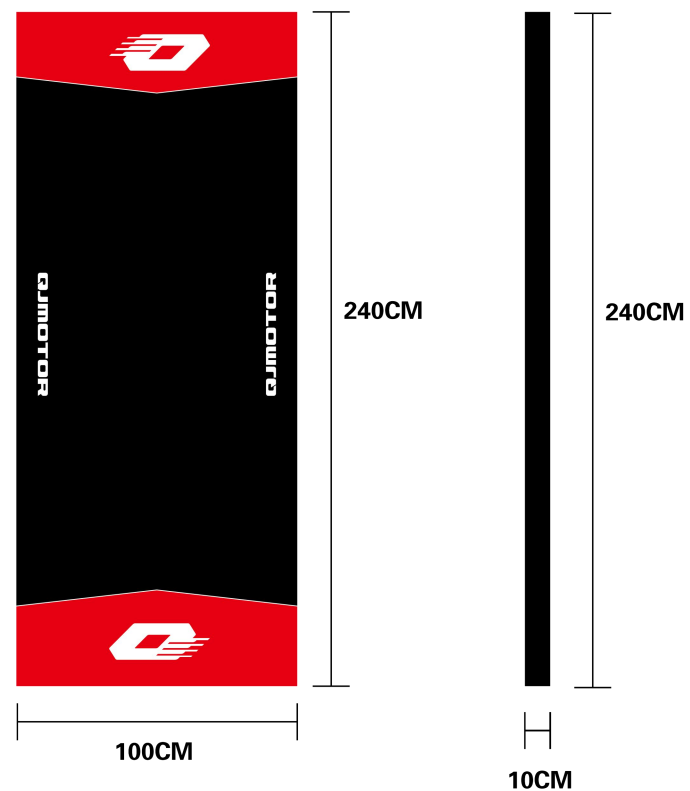

KEY VISUAL ELEMENTS AND USAGE GUIDELIN

